




How do I adjust the trap doors?

Insert screwdrivers in between the top of the door and the bottom of the side trap frame member to wedge the door down. Push the spur gear cross shaft up against the rack and using the TimpTe clearance gage (Part #035-38065) or a 7/64 drill bit for clearance, tighten down the fasteners. Remove the gage/drill bit and rotate the cross shaft with your hand. You will feel a backlash (movement to the shaft prior to engagement on the rack) and this is normal and correct. Remove the screwdriver wedges and run the door open and closed with your hand using the cross shaft. It should run smooth and easy.

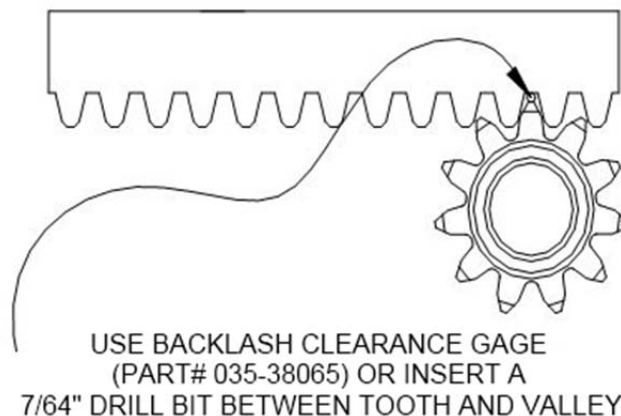

See Your Local TimpTe Branch For All Your Parts And Service Needs!

© 2011 TimpTe Inc.

www.timpTe.com