

### Parts Detail:


- Plug 2 Pole Vertical
- 4 GA Jumper 4" Red
- 50 Amp Breaker (Tarp) 100/150 Amp Breaker (EZ Flow)
- 25' or 20' Dual Conductor Cable
- 3/8" Cable Lug
- 1/4" Cable Lug
- (20) Zip Ties
- Heat Shrink



### Procedure:

**Step 1 - Conductor Plug:** Unfasten and remove insert from conductor plug. Feed wire through plug and into brass contacts on insert. Tighten set screws. Replace insert into conductor plug and secure screw. **Make sure the positive wire is on top! Wiring with the black wire on top can result in serious damage to the tractor and/or trailer!**

**Step 2 - Circuit Breaker:** Install the circuit breaker using the 4" jumper wire from the battery. Crimp 3/8" cable lug to black wire and 1/4" cable lug to the red wire. (See wiring diagram)

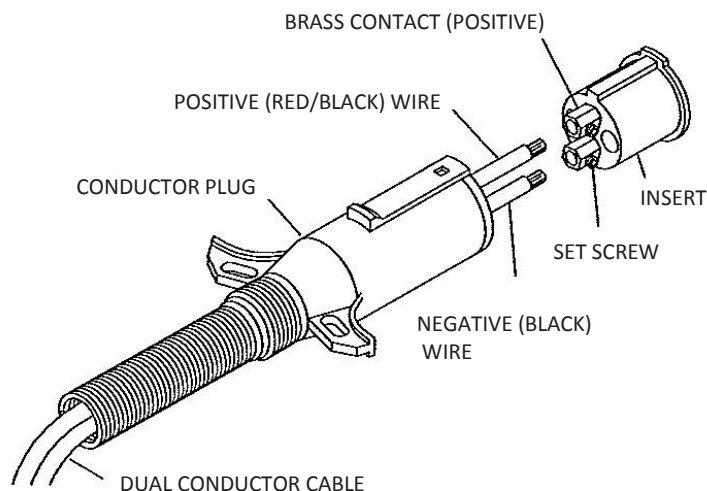

**NOTE: Install heat shrink to seal ring terminal and wire connections, 2 places**

