




Thunder Power Tarp Kit Installation Guide

Part# 101705 Dual Arm – Curb Side Stowing
Part# 101706 Single Arm – Curb Side Stowing

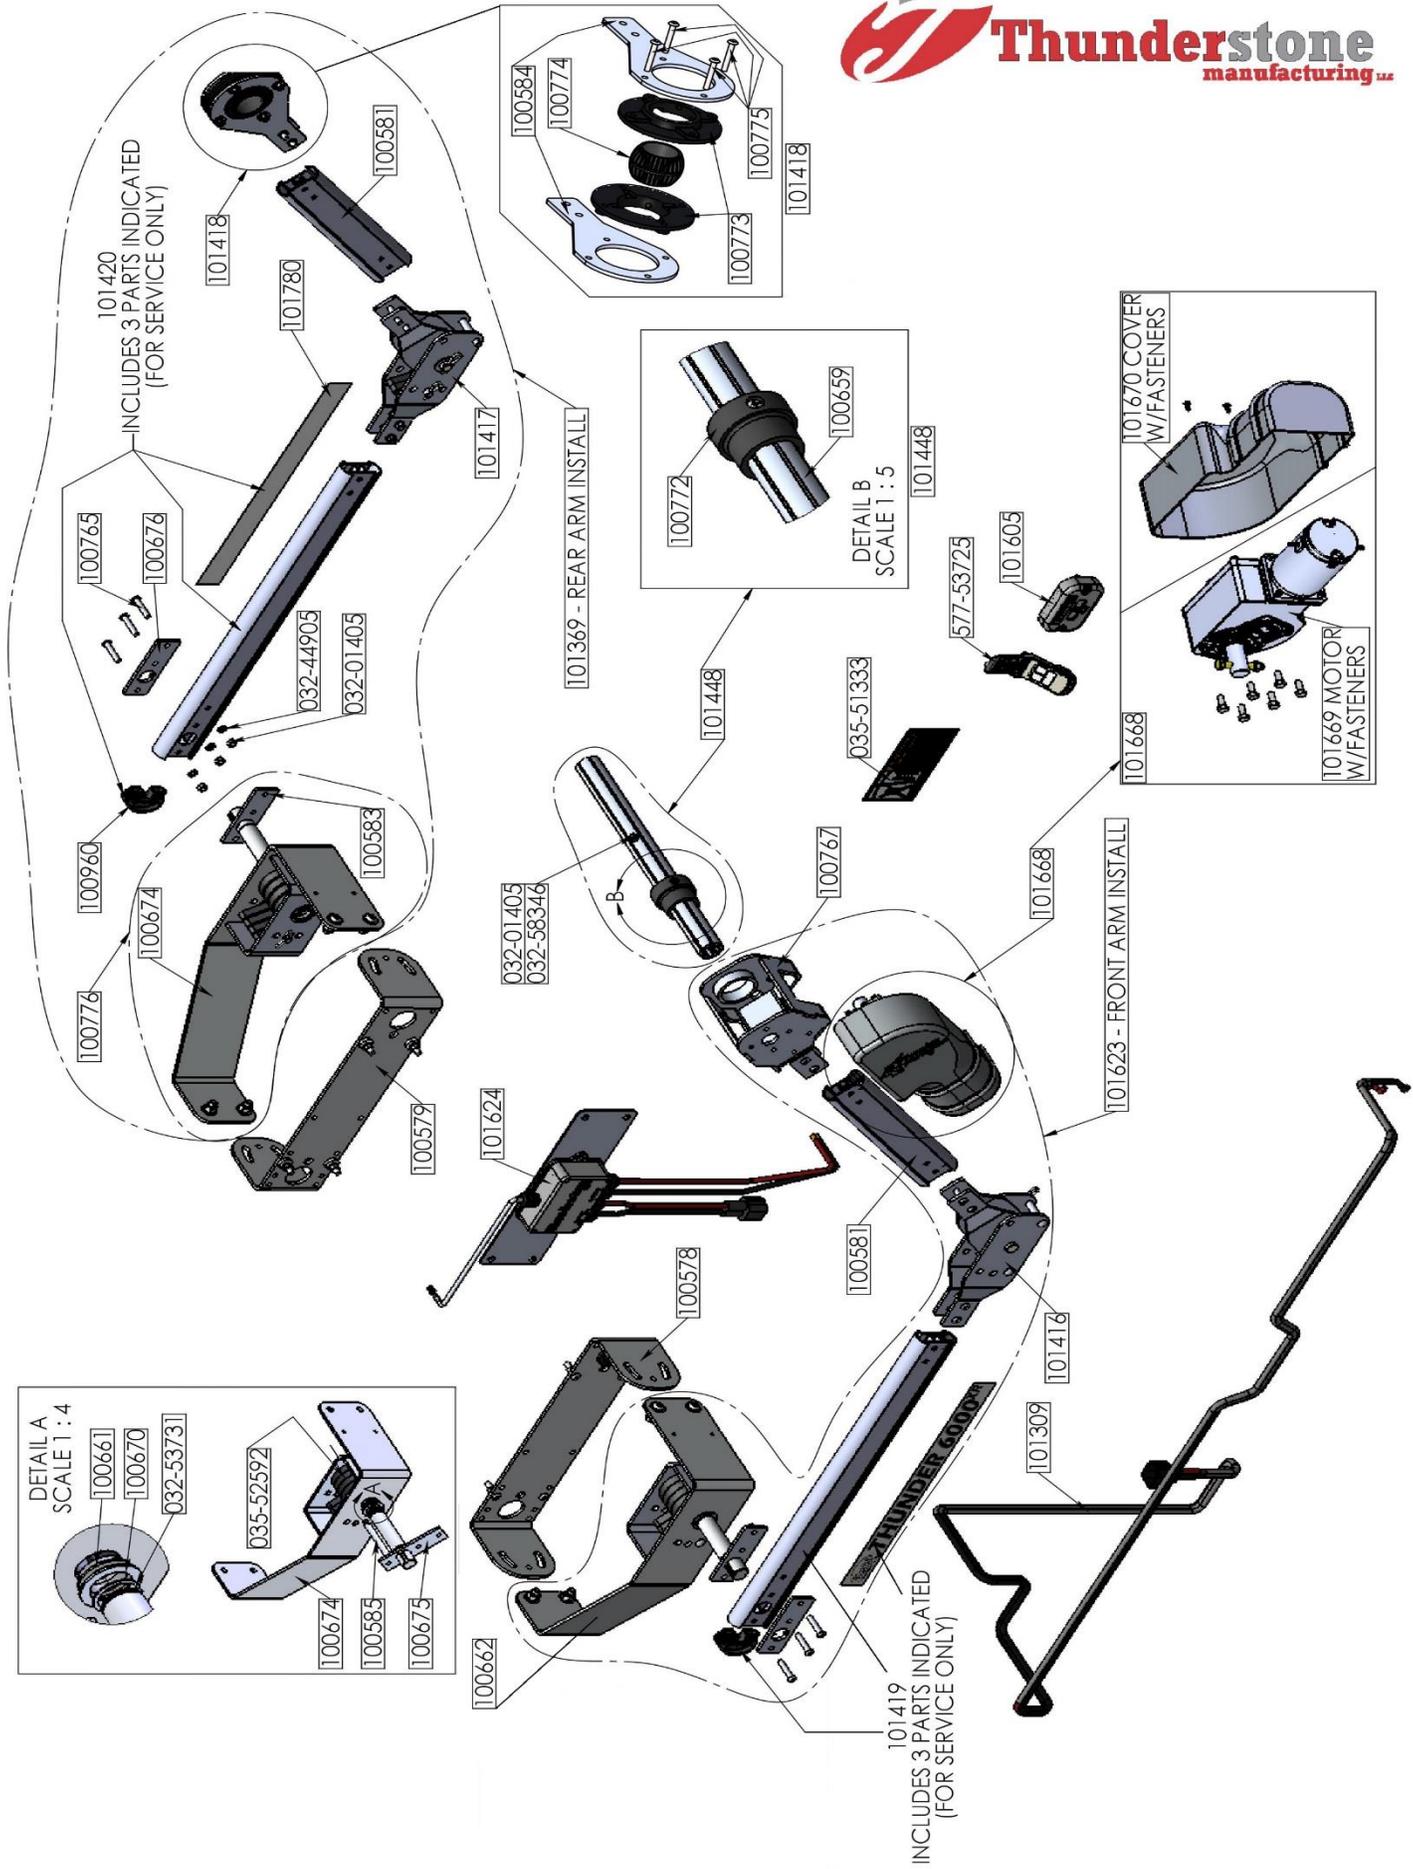

ARM INSTALLATION INSTRUCTIONS

Note:

This kit converts an existing manual crank system that has an existing locking latch plate on the roadside and tarp stops on the curbside into an electric one-touch system.

Preparation:

1. Roll the tarp to the covered position.
2. Remove the hand crank attachment from the back of the axle.
3. Remove the roll return mechanism(s) from the front and/or back of the axle.

Note:

Keep the hand crank attachment. If the motor is damaged, or the system cannot be powered, you can disengage the motor, slide the hand crank attachment on to the adapter and pin it in place. This will allow you to use your hand crank as a backup. (The motor adapter will be installed in later steps.)

Tools Needed:

Standard Wrench Set
Standard Deep-well Socket Set
Cordless Drill
Hole saw set up to 2 1/2"
Screwdriver Set
Socket Extension
Wire Cutters
Wire strippers/crimpers

Install Tarp Axle Extension

1. Locate the 3'-0" (36in.) axle extension. The axle extension will be swaged on one end. See figure 3.1.
2. If the current manual tarp system has a front bungee return, remove the entire bungee cord, plastic guide, and 10' PVC tube from the front of your axle pipe.
3. Remove the eyebolt from the front of the Latch Plate.
4. Remove tarp clips along the length of the tarp axle tube and slide tarp axle tube forward 16".
5. Insert the swaged end of the axle extension into the front of your tarp axle. If possible, weld axle extension to tarp axle and let cool fully before proceeding to next step. (If you cannot weld the extension into the roll tube, use the four 1/4" x 1-1/4" self-drilling Phillips head screws that are included in fastener bag to attach the extension). Attach the axle extension to the tarp axle in at least four places at 90 degrees from each other. See figure 3.2.

(Make sure weld is cooled before sliding roll tube back into tarp!)

6. Slide axle back into tarp, and go to rear of trailer. Slide the tarp axle back until the end of the spline on the back of the axle is 22" to 24" away from the end of the tarp.
7. When the distance at the rear of the trailer is set, go to the front of the trailer and measure 15" - 17" from the front of the tarp, and mark the axle.
8. Cut the axle at mark to remove excess material, and then remove the burrs from the end of the axle that was cut.
9. On a slanted rear system the rear distance is 30" to 32" from the rear of the tarp and for a slanted front system the front dimension is 16" to 18" from the front of the tarp to the extension end.

Swaged End

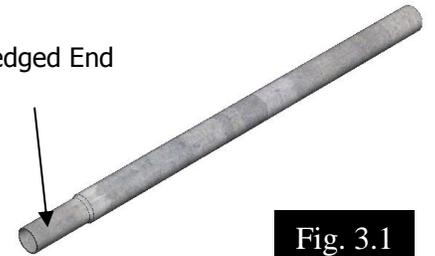


Fig. 3.1

90° from each other

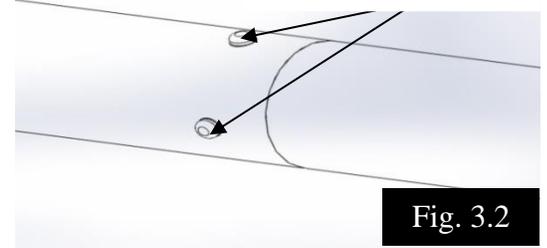


Fig. 3.2

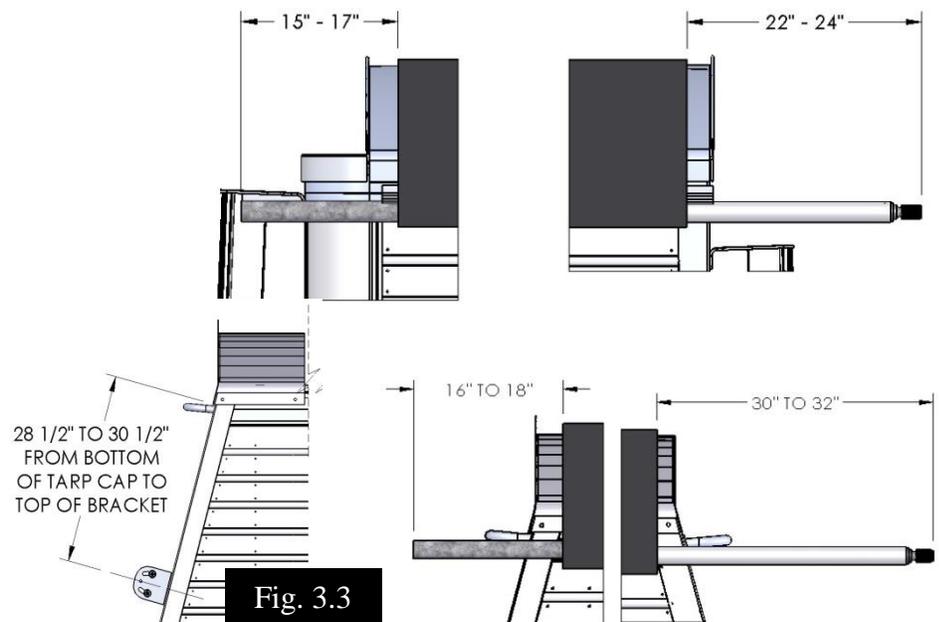


Fig. 3.3

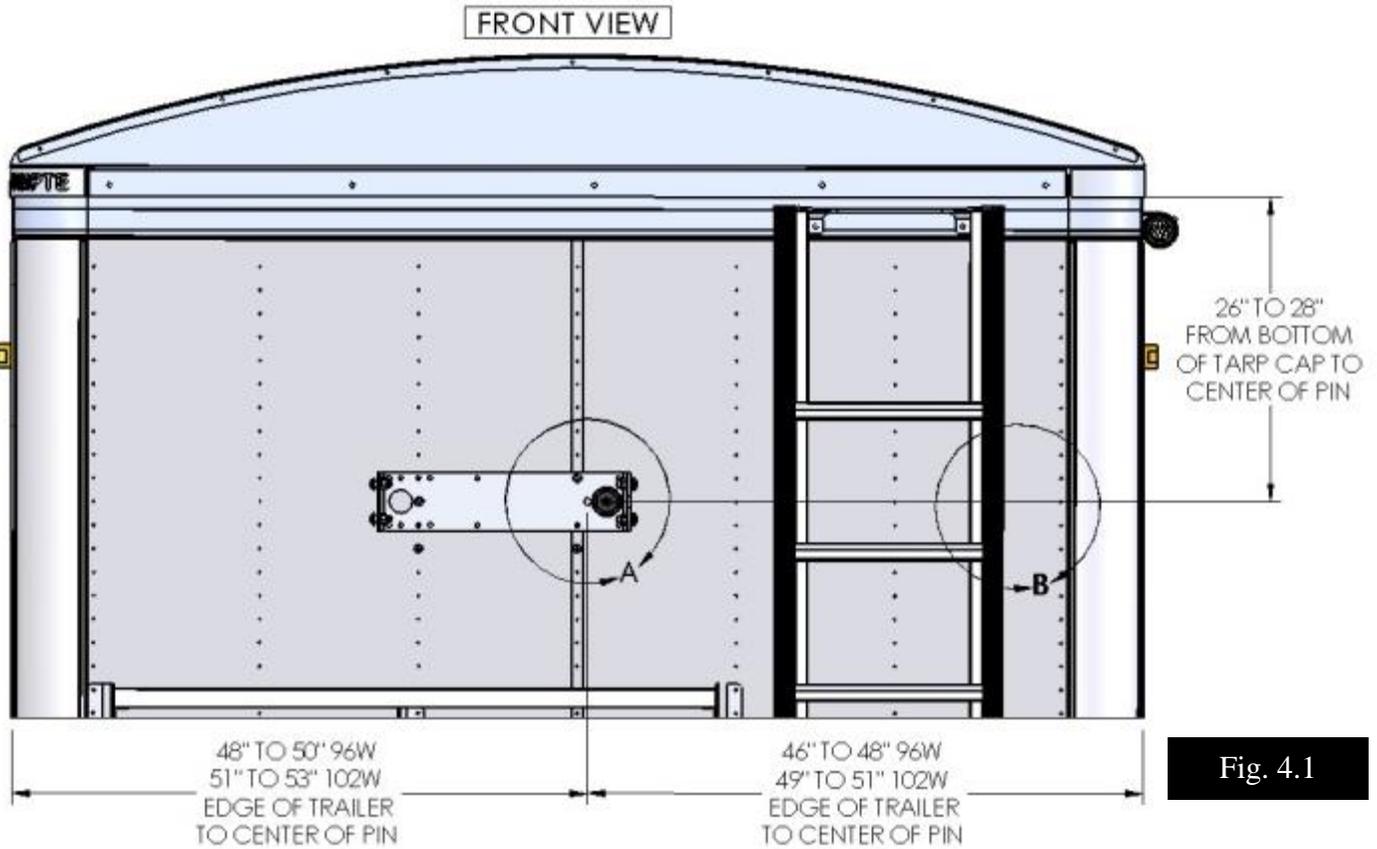


Fig. 4.1

Front Pivot Installation

1. On the front of the trailer measure from the bottom of the tarp cap, for square nose trailers measure straight down approximately 27" and put a mark on the front face of the trailer. **This line should be as close to center as possible.** Refer to the figure 4.1.
2. For slant nose trailers measure approximately 29 1/2" from the bottom of the tarp cap. Refer to the figure 3.3.
3. Line up the 5/8" hole in the inner bracket with the mark made in step 1. Refer to the figure 4.2.
4. Find the four fasteners that line up to four of the holes in the bracket. If no holes in the bracket line up with the fasteners in the nose of the trailer the pivot point can be moved up to 2" to roadside and up to 1" to curbside along the horizontal dimensions shown. The bracket can be moved up to 1" higher or lower on the vertical axis.
5. Once the holes in the bracket are lined up with four fasteners, mark these four fasteners and set the bracket aside for now.
6. Using a drill with a 1/4" drill bit remove the existing rivets that will be behind bracket. The bracket will be mounted flat against the nose of the trailer so you will have to remove 6 fasteners total.
7. Drill four 25/64" (.390") holes where the four top and bottom fasteners were that were marked.
8. Align the holes in bracket with holes on nose of trailer and bolt in place using four 3/8" button head bolts, 3/8" washers, and 3/8" lock nuts provided.
9. Drill a 2" hole in the nose of trailer using the hole in bracket as a guide. This will be used for motor wire to pass through. See Fig. 4.2
10. If you have a straight nose trailer, bolt the front outer bracket to the inner bracket using the four 1/2" hex head bolts, lock nuts, and washers provided. Tighten the fasteners until they are snug but not tight. It will appear as shown in the figure 5.3.

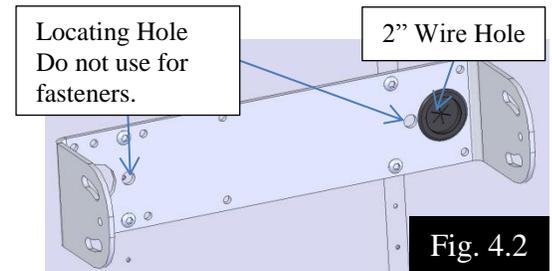


Fig. 4.2

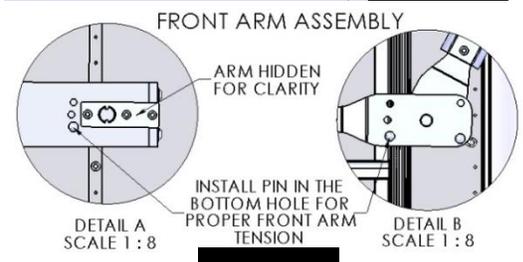


Fig. 4.3

Note: The angled face of the bracket is opposite the ladder side on both the nose and rear of the trailer.

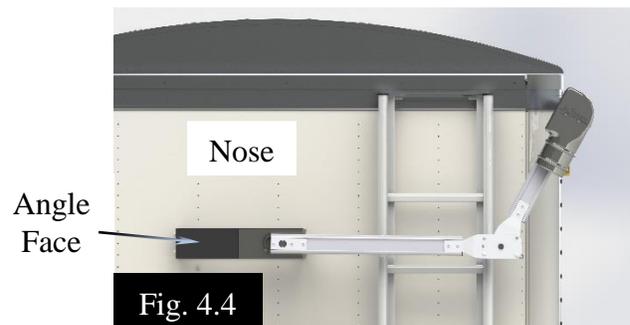


Fig. 4.4

11. If you have a slant nose trailer, bolt the front outer bracket on using two ½” bolts and lock nuts and washers as shown in figure 5.3 in the lower bolt holes. Tighten the fasteners until they are snug but not tight.
12. Put two ½” fasteners into the upper bolt holes and tighten until they are snug but not tight, they will be tightened after arm is attached to the roll tube.

Adapter Extension Installation

1. Locate the adapter extrusion with the pre-installed polymer bushing. Refer to figure 5.1.
2. Slide the end of the adapter without the pre-drilled hole in it into the front of the existing 2” tarp axle and leave a 1” gap between the face polymer bushing and the tarp axle.
3. If the extrusion is too long measure from the end of the tarp axle to the face of the polymer bushing. Subtract 1/2” from that dimension and remove the adapter extrusion from the tarp axle.
4. Measure and remove the excess material from the end of the adapter extrusion without the bushing and the pre-drilled hole.

(Example if there is 2” between the face of the bushing and the tarp axle remove the extrusion and cut off 1 ½” from the length of the adapter extrusion.)

5. Reinsert the adapter extrusion into the tarp axle.
6. Do not attach at this time it must be free floating until after installed into the front arm.

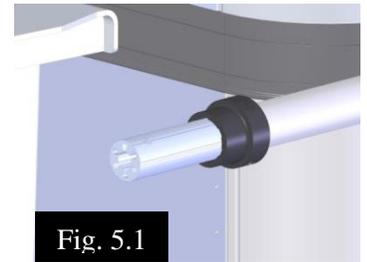


Fig. 5.1

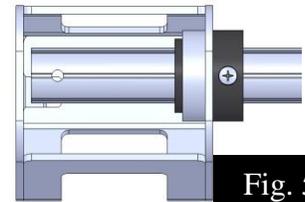


Fig. 5.2

Front Arm to Adapter Extension Installation

1. The spring pin is installed into the lowest hole in the 3-hole pattern at both the pivot assembly and the knuckle. When the arm is rotated up toward the axle, this will be the lowest spring tension.
2. Rotate the brackets until the outer bracket is level.
3. Rotate the pivot arm and motor up to the axle and slide axle adapter into the head of the motor mount bracket and onto the motor shaft.
4. Make sure that the polymer bushing is fully seated in the aluminum head that is bolted to the arm as shown in Fig. 5.2
5. Rotate the adapter extrusion until it aligns with the hole in the motor shaft.
6. Attach the adapter extrusion to the motor shaft using the 3/8” x 3” grade-8 bolt and lock nut that is provided. Do not tighten at this time.
7. Tighten the ½” fasteners that hold the outer bracket to the inner bracket.
8. After the ½” fasteners are tightened lock the bracket into place by using the .390 holes in the inner bracket as a guides and drilling a 25/64” (.390”) hole through each side of the outer bracket. Use a 3/8” bolt and lock nut to secure the bracket and prevent it from shifting.
9. The completed arm assembly will appear as shown in figure 5.4 when seen from the front of the trailer.

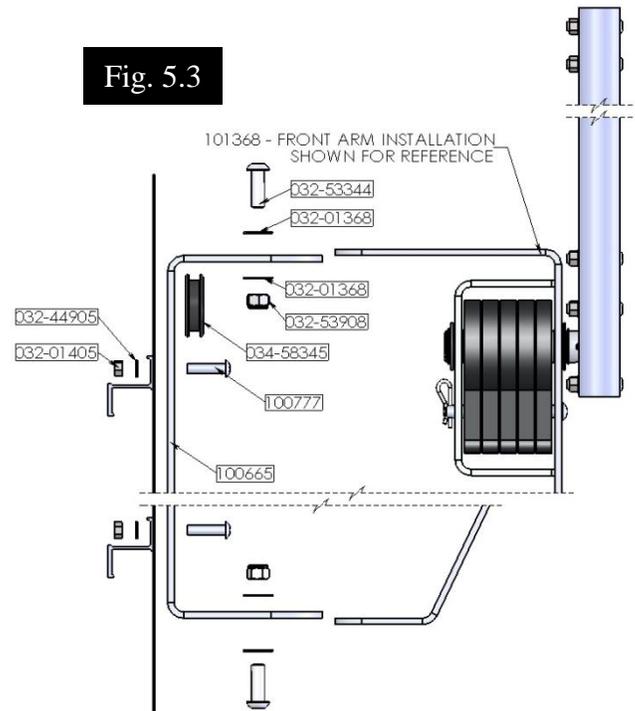


Fig. 5.3



Fig. 5.4

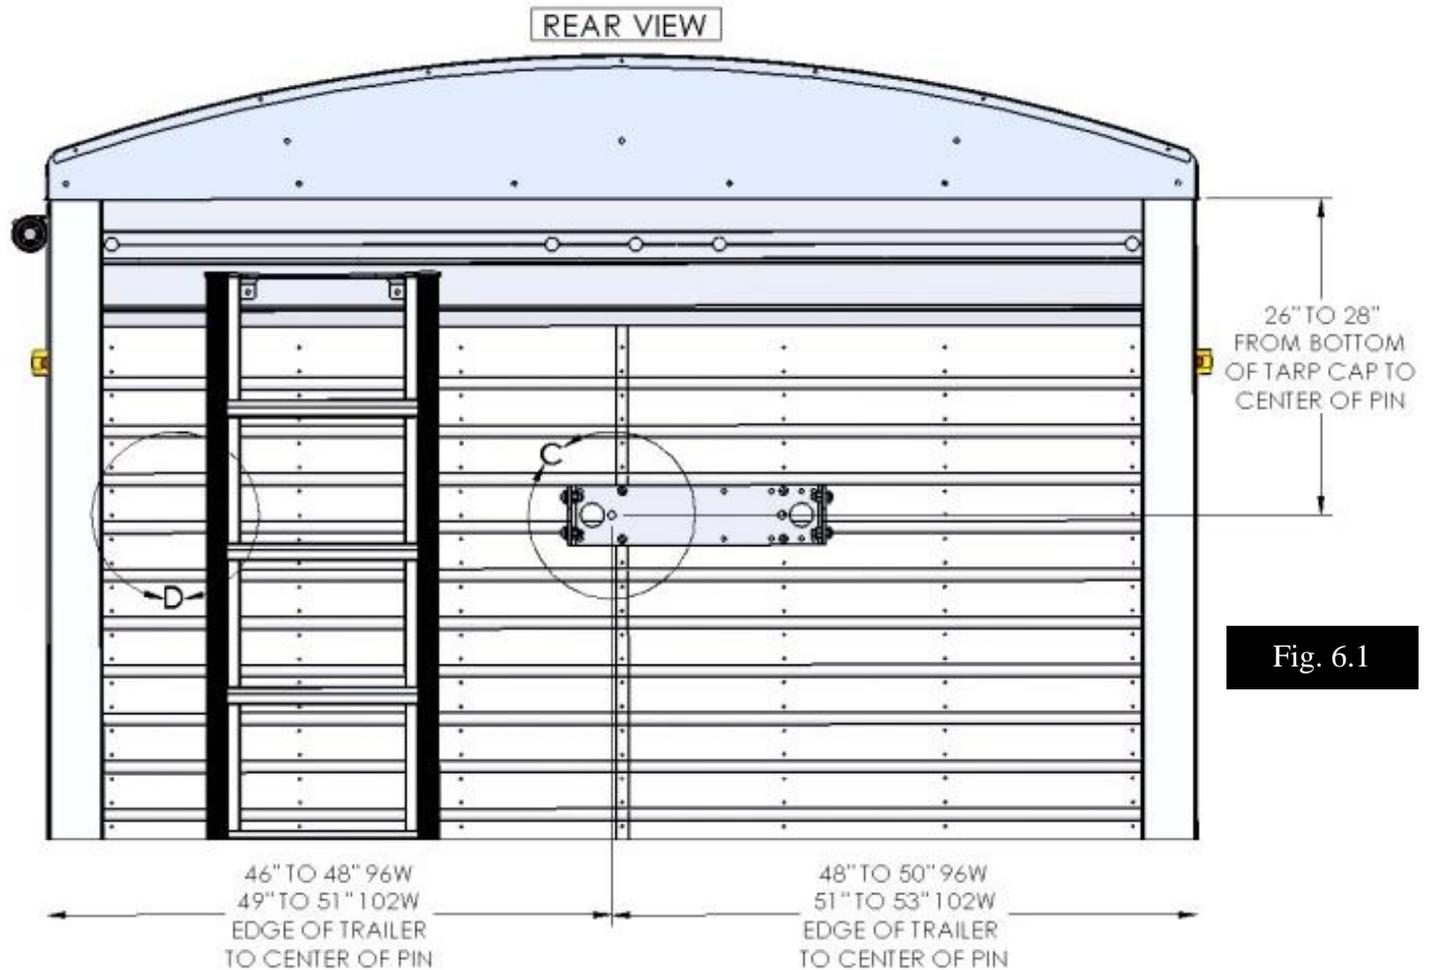



Fig. 6.1

Rear Pivot Installation

For single arm system only the front brackets and arms are installed.

1. On the rear of the trailer measure from the bottom of the tarp cap, straight down 26" to 28" and put a mark on the rear face of the trailer **as close to center as possible**. Refer to figure 6.1.
2. For slant nose trailers measure approximately 29 1/2" from the bottom of the tarp cap. Refer to the figure 6.2.
3. Line up the 5/8" hole in the inner bracket with the mark made in step 1. Refer to figure 6.1.
4. Find the four fasteners that line up to four of the holes in the bracket. If no holes in the bracket line up with the fasteners in the nose of the trailer the pivot point can be moved up to 2" to roadside or up to 1" to curbside along the horizontal dimensions shown. The bracket can be moved up to 1" higher or lower on the vertical axis.
5. Once the holes in the bracket are lined up with four fasteners, mark these four fasteners and set the bracket aside for now.
6. Using a drill with a 1/4" drill bit remove the existing rivets that will be behind bracket. The bracket will be mounted using 1/4" plastic washer so only remove the 4 fasteners directly behind the four holes in the bracket.
7. Drill four 25/64" (.390") holes where the four fasteners were that were marked.
8. Align the holes in bracket with holes on rear of trailer and bolt in place using the four 3/8" button head bolts, plastic washers, 3/8" washers, and 3/8" lock nuts provided.

Fig. 6.2

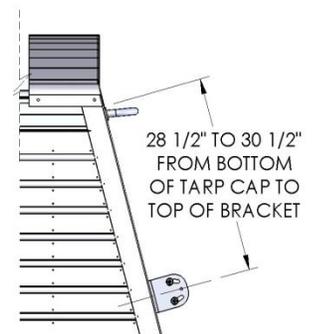

Note: The angled face of the bracket is opposite the ladder side on both the nose and rear of the trailer.

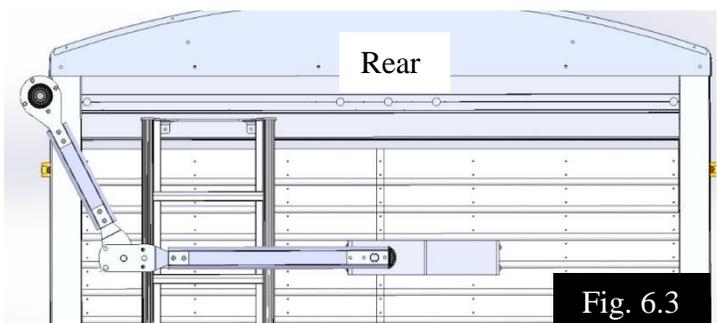


Fig. 6.3

Rear Arm Installation

1. The spring pin is installed into the middle hole in the 3-hole pattern at both the pivot assembly and the knuckle. When the arm is rotated up toward the axle, this will be the medium spring tension. See figure 7.1.
2. Slide one of the locking collars onto the roll tube. Do not attach the locking collar at this time.
3. If you have a straight back trailer bolt the rear outer bracket to the inner bracket using the four 1/2" hex head bolts, lock nuts, and washers provided. Tighten the fasteners until they are snug but not tight. It will appear as shown in the figure 7.2.
4. If you have a slant nose trailer, bolt the front outer bracket on using two 1/2" bolts and nuts and washers as shown in fig. 7.2 in the lower bolt holes. Tighten the fasteners until they are snug but not tight.
5. Put two 1/2" fasteners into the upper bolt holes and tighten until they are snug but not tight.
6. Rotate the brackets until the outer bracket is level.
7. Rotate the arm up until the ball socket assembly can be slipped onto the roll tube as shown in figure 7.3. The bushing may have to be tapped with a rubber mallet to get it past the weld on the spline shaft.
8. Tighten the fasteners to hold the bracket in place. It will appear as shown in figure 7.3.
9. After the 1/2" fasteners are tightened lock the bracket into place by using the .390 holes in the inner bracket as a guides and drilling a 25/64" (.390") hole through each side of the outer bracket. Use a 3/8" bolt and lock nut to secure the bracket and prevent it from shifting.
10. The finished assembly should look like figure 7.3 when seen from the rear of the trailer.

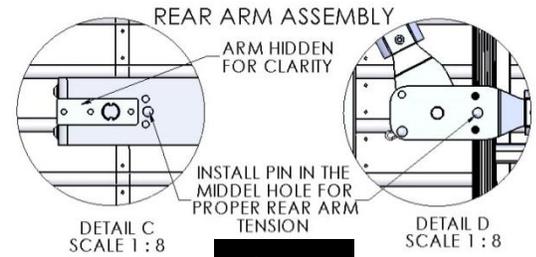


Fig. 7.1

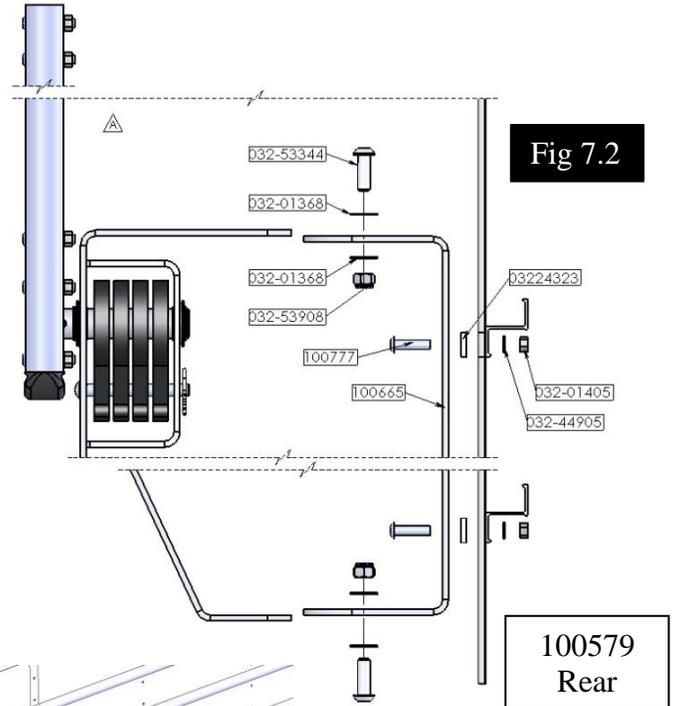


Fig 7.2

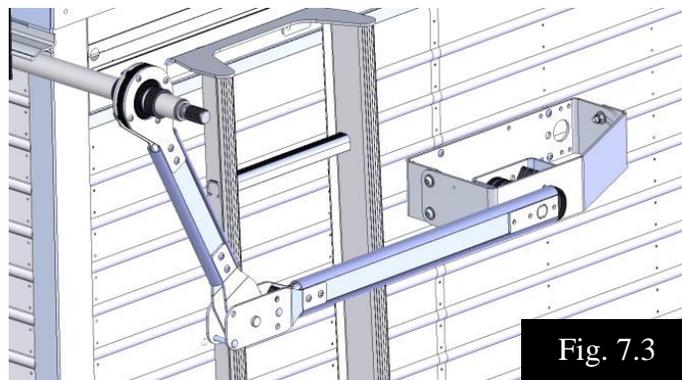


Fig. 7.3

Arm Wiring

1. Run the wire that is pre run through the front arm through the hole in the front bracket. **The wire should hang below the bracket to prevent the wire from rubbing and creating a short.**
2. Insert the grommet that is on the wire into the 2" hole in the mounting bracket. This need to be installed to prevent the wire from being damaged by rubbing in the aluminum hole. Leave some slack in the wire so the wire will not be stretched when the arm is swinging across the front of the trailer shown in Fig. 7.4.

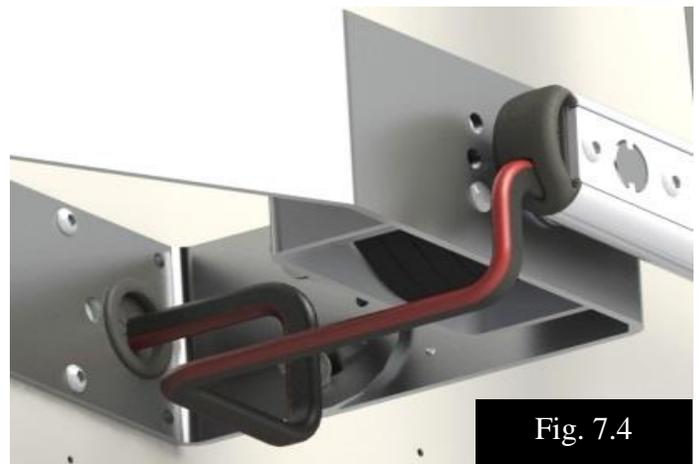


Fig. 7.4

Mounting the External Keypad Controller

1. On the nose of the trailer, drill a 1 1/4" hole approximately 6 3/4" up from the top of the lower frame rail and 2 3/8" (96W) or 5 3/8" (102W) in from the edge of the round roadside corner post. *(It is recommended that you drill the holes in this step from the inside out to avoid hitting a wire or air hose on the inside of the nose.)*

Place the tarp external keypad to the nose of the trailer.

2. Locate the tarp external keypad approximately 9 3/4" from the bottom rail of the nose of the trailer.
3. Drill two 17/64" holes in the nose of the trailer using the tarp external keypad as a template, or use the template located at the back of this manual.
4. Install the tarp external keypad to the nose of the trailer using two 1/4"-20 x 1 1/2" Phillips pan head screws, the 1/4" lock washers, and 1/4"-20 nuts.
5. Make sure that all fasteners are tightened.


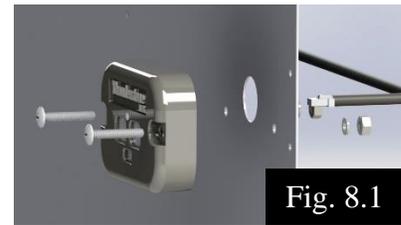


Fig. 8.1

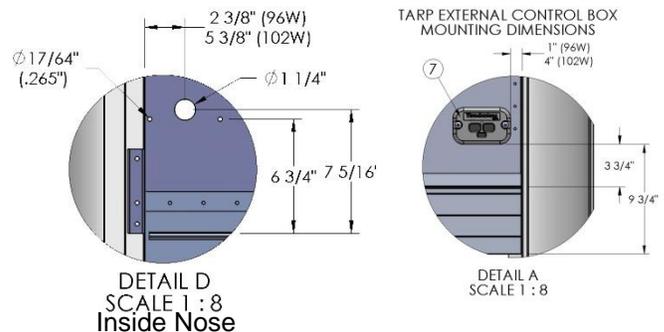

Mounting the Inner Control Box

1. Attach the control box to the mounting plate using two 1/4"-20 x 1 1/2" Phillips pan head screws, the 1/4" lock washers, and 1/4"-20 nuts.
2. Make sure that all fasteners are tightened.
3. Choose a location inside the nose of the trailer between two Z-posts above the power receptacle so that all wires can reach the junction box refer to fig. 8.2.
4. Clamp the plate to the Z-posts using vice grip pliers or C-clamps to hold in place.
5. Use four #10 x 3/4" self-tapping screws to attach the mounting plate to the Z-posts using the predrilled hole in the plate as a guide.

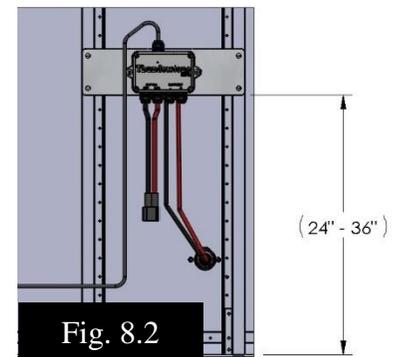


Fig. 8.2

Wiring the Inner Control Box

Connecting the motor plug:

1. Insert the two plugs together until you hear the click sound. Verify that the wires match colors on each side of the plug, red to red, black to black.
2. Slide the white safety lock toward the male connector until seated.

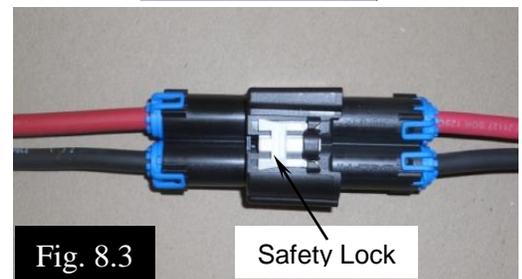


Fig. 8.3

Safety Lock

Disconnecting the motor plug:

1. Unlock the safety lock by sliding the white safety lock toward the female connector until unlocked.
2. Lift on the locking tab to disconnect the latch and pull the plug apart.

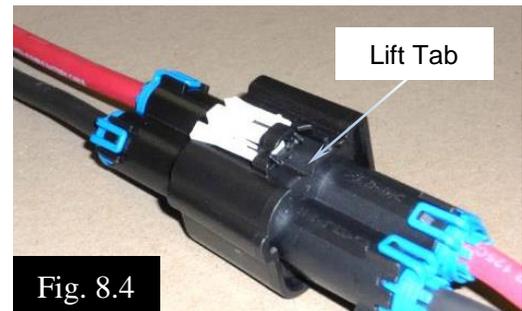


Fig. 8.4

Lift Tab

Connect the keypad communications cable:

1. Locate the communications cable coming from the top of the inner control box.
2. Plug the end of the connector into the back of the external keypad in the nose of the trailer.
3. Remove any existing wire guarding and use a zip tie to secure the communications cable to the airline (or equivalent) below the keypad. This will keep the cable from slouching. See figure 8.5.
4. Replace wire guarding with communications cable behind for protection.


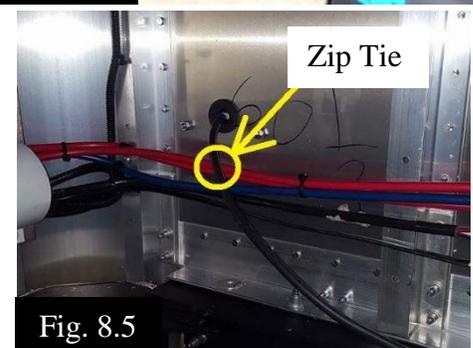


Fig. 8.5

Zip Tie

Install the 2-Pole Receptacle

1. On the nose doubler plate (where the air & power are), mark a position that will allow the 2-pole receptacle to be installed. When selecting a spot to install the receptacle do not place the receptacle where it will interfere with the connection of the glad hands. *(It is recommended that you drill the holes in this step from the inside out to avoid hitting a wire or air hose on the inside of the trailer.)* Drill a 2 1/8" hole for the receptacle body to go through.
2. Slide the receptacle through the hole in the nose and mark where the holes for the screws will go. Drill a 9/32" hole for each of the screws. Insert the receptacle and attach using the 1/4" x 1 1/2" Phillips head screws, 1/4" nuts, and 1/4" lock washers.

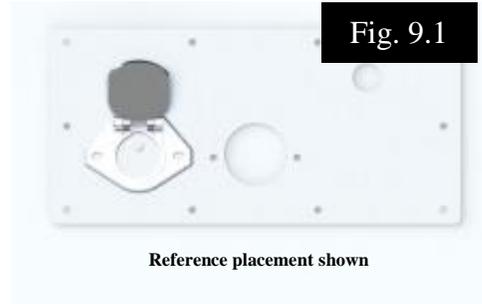

Wiring – 2 Pole Receptacle




1. Strip back 3/8" - 1/2" insulation on the BAT+ and BAT- wires coming from the inner tarp control box if this hasn't already been done.
2. Place supplied large rubber boot over the BAT wires.
3. Insert the BAT+ (red) wire into the top terminal hole on the 2-pole receptacle and tighten the set screw securing the wire. (Use dielectric grease on the wire prior to inserting into the power receptacle) see figure 9.2.
4. Insert the BAT- (black) wire into the bottom terminal hole on the 2-pole receptacle and tighten the set screw securing the wire. (Use dielectric grease on the wire prior to inserting into the power receptacle) see figure 9.2.
5. Slide the large rubber boot up to cover the back of the 2-pole receptacle.



Finalize Axle Assembly

1. Secure the motor to the roll-pipe adapter using the 3/8" x 3" grade 8 bolt and 3/8" lock nut supplied with the motor. Tighten the bolt until it is very snug.
2. Use the operation instructions to power up the system.
3. Run the motor in each direction for approximately 10 seconds to make sure the adapter tube is aligned with the roll tube.
4. Once in place, drill a 3/8" hole through the roll tube and axle adapter, use the grooves in the axle adapter as a guide.
5. Use the 3/8" x 2-1/2" supplied grade 8 bolt and lock nut to attach the adapter to the existing axle.
6. Run the motor in each direction for about 10 seconds to self-center the axle through the tarp and rear arm bushing.
7. Slide the second locking collar behind the rear arm bushing see figure 9.4.
8. Use #10 x 3/4" self-drilling screws and attach the locking collars on each side of the rear arm bushing. Leave approximately 1/2" to 1" gap between the clip and both the front of the bushing and the rear of the bushing to allow room for the arm to float slightly on the axle.
9. Replace all tarp clips using the supplied #10 x 3/4" self-drilling screws as shown in figure 9.5.

(NOTE: Make sure to screw tarp clips into the bottom of the tarp pipe while tarp is fully extended.)

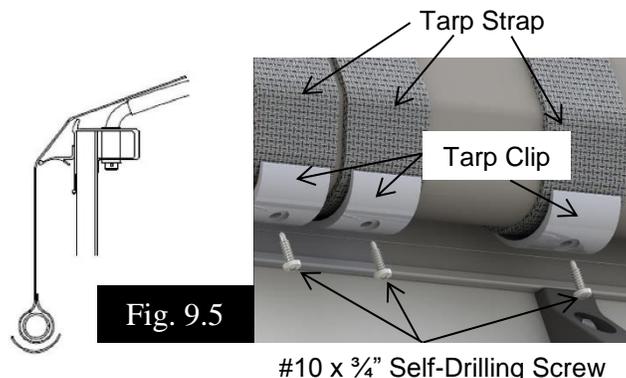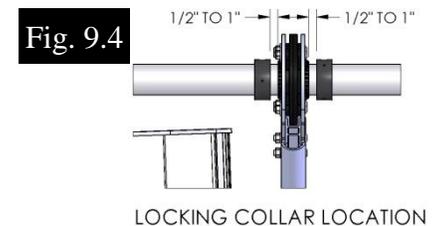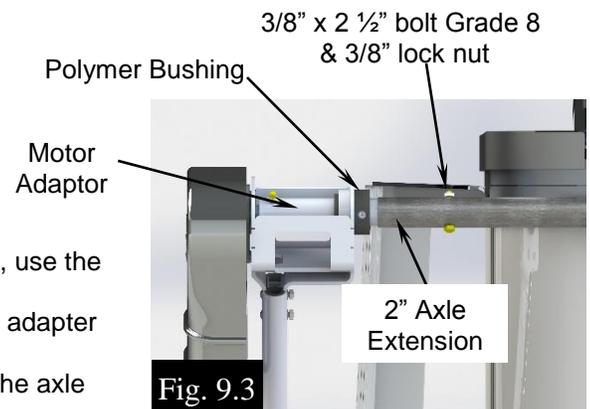

Crank Handle Retainer Installation

1. Assemble the crank handle retainer shown in figure 10.1.
2. Attach crank handle retainer to the curbside of trailer using supplied 3/8" rib neck carriage bolts, washers, and lock nuts as shown in figure 10.2.

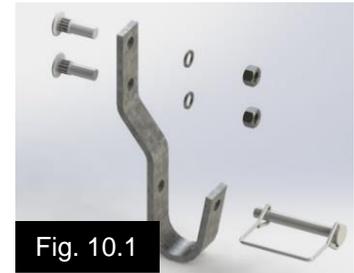
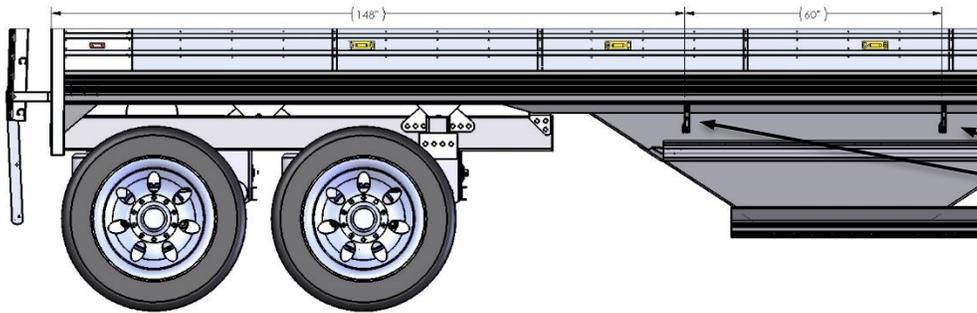


Fig. 10.1

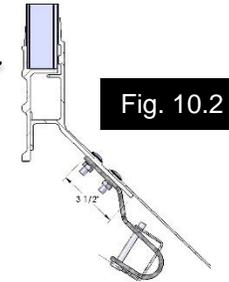


Fig. 10.2

Place provided warning label in clear view above the tarp control box for safety as shown in Fig 10.3.



Fig. 10.3

Placement of Corner Light

Determine if you have the old style light shown in figure 10.4.

1. If you have the old style light, unfasten light from corner radius of trailer.
2. Move the light around the corner approximately 3"-4" or until the roll tube extension clears the light See figure 10.5.

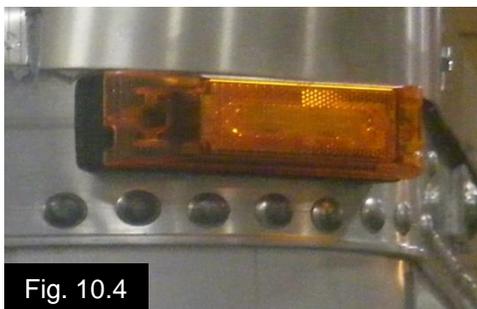


Fig. 10.4


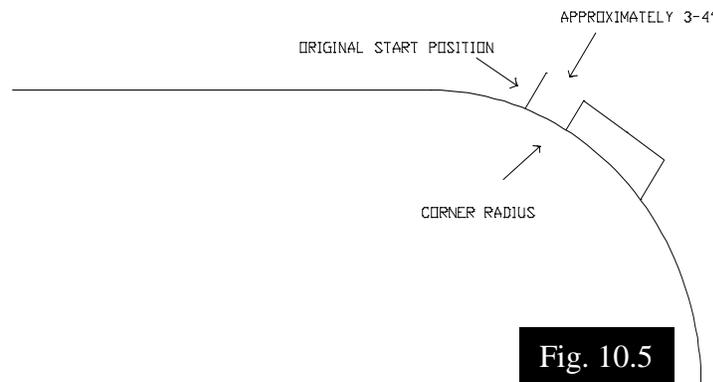


Fig. 10.5

3. Re-fasten light to corner radius of trailer.

HOLE PATTERNS

ELECTRICAL PLUG

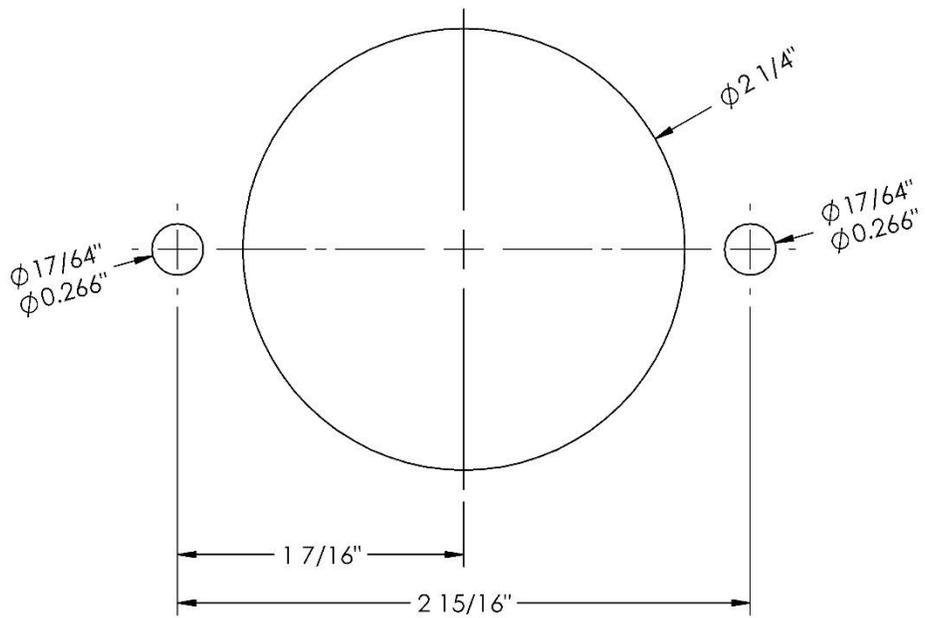

CONTROL BOX

