



# TIMPTE® SUPER HOPPER

---

## RTAC DOUBLES



---

*BUILT FOR THE ROAD AHEAD*

---

**#1 SELLING GRAIN HOPPER  
IN NORTH AMERICA**

[www.TIMPTE.com](http://www.TIMPTE.com)


**TIMPTE.**

*Since 1884*

# STANDARD FEATURES

1. Standard with aluminum ladder, platform, and 36" grab bar on front (Two on Rear)
2. .063" aluminum panels are used in all high stress areas for added strength and durability.
- 4' Exterior Side Panels: A long time Timpte trademark that offers unmatched strength and ease of repair. The smooth aerodynamic exterior sidewalls mean less wind drag and lower fuel costs.
- Timpte double wall construction allows for a smooth interior wall, therefore improving the flow of grain. No ledge or dead spot for grain or bulk commodities to build up like other brands.
3. 20" king pin setting. Allows for better load distribution and more swing clearance.
4. Lights & Electrical: All weather-pack automotive style connections, sealed to prevent corrosion. Each trailer has two amber LED front clearance lamps. Sidewalls are equipped with 3 amber LED marker lamps, 2 red LED marker lamps, and 1 amber mid-turn/marker lamp in 2 rows of 3 lamps per side.
- Rear Lamps: All weather-pack automotive style connections, sealed to prevent corrosion. 3 high-mounted red LED ID lamps and 2 high mounted red LED clearance lamps on the rear frame header; one LED license light; 6 four-inch diameter, 7-diode red LED lamps, grommet mounted — two red turn signals and four red stop/tail lamps.
5. The upper coupler assembly is a beam truss designed for the rigors of field use. Extra crossmembers and an "X" brace are added for extra strength for field application.
6. Timpte's standard landing gear is a Holland Atlas 55 "No Lube" with a low profile cushion foot sand shoe.
7. Timpte traps are made of 1/4" aluminum plate with hat section stiffeners to minimize deflection. Each door rides on 26 sealed H.D. 1.6" diameter roller bearings designed to give years of trouble free service. Note the interior trap door seal protects against moisture intrusion.
- Single Speed Door Opener: The trap operator shaft on single speed openers has been repositioned for ease of operation and clearance for swing augers.
8. 18 oz. All-Welded Tarp: Heat-welded seams add strength and thickness to high stress areas.
9. Air Ride Dump Valve and Oil Filled Pressure Gauge: Included with all air-ride suspensions.
10. Standard ABS System: Timpte is standard with the premium Meritor/Wabco A.B.S. system utilizing four wheel sensors, and two modulating valves.
11. Standard Flip Step Ladder: The Timpte Original! A functional ladder extension that stores in the upward position and is swung down to provide unequaled rear access and safety.
12. Rear Corner Frame Posts: The ability to vent through the corner posts.
13. Heavy duty extruded aluminum box design top rail eliminates having to use fixed structural tarp bows. Timpte bows are easily replaced if damaged. Two ridge straps are standard.

## RETRACTABLE TELESCOPING TONGUE

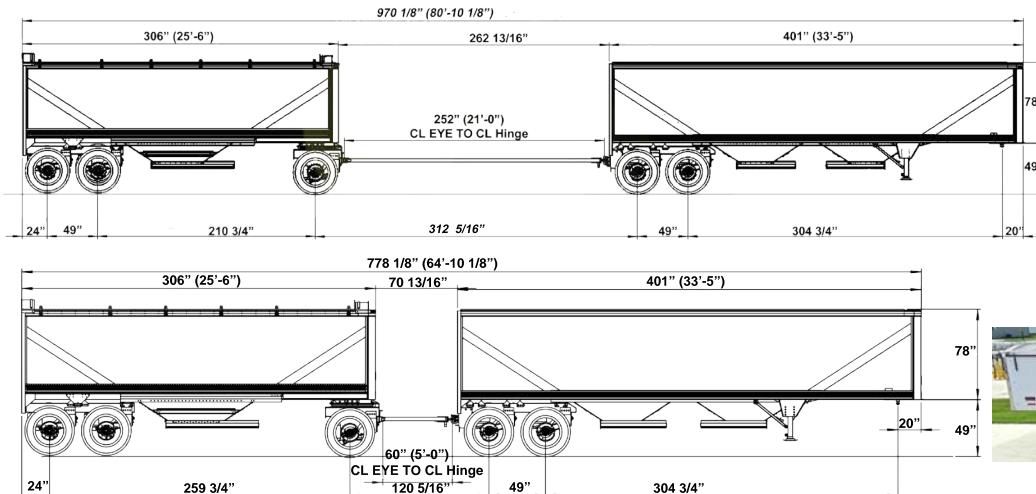

## OTHER TONGUE OPTIONS AVAILABLE

## CAPACITIES

LENGTH & HEIGHT
33' 5" Length, 78" Height
25' 6" Length, 78" Height

HEAPED 9"
102" Wide / Ag Tub
1595 ft <sup>3</sup>
1131 ft <sup>3</sup>

WATER LEVEL
102" Wide / Ag Tub
1439 ft <sup>3</sup>
1013 ft <sup>3</sup>

**TIMpte**

*Since 1884*