




EQUIPMENT TRAILERS

INSTALLATION MANUAL

Spare Tire Mount

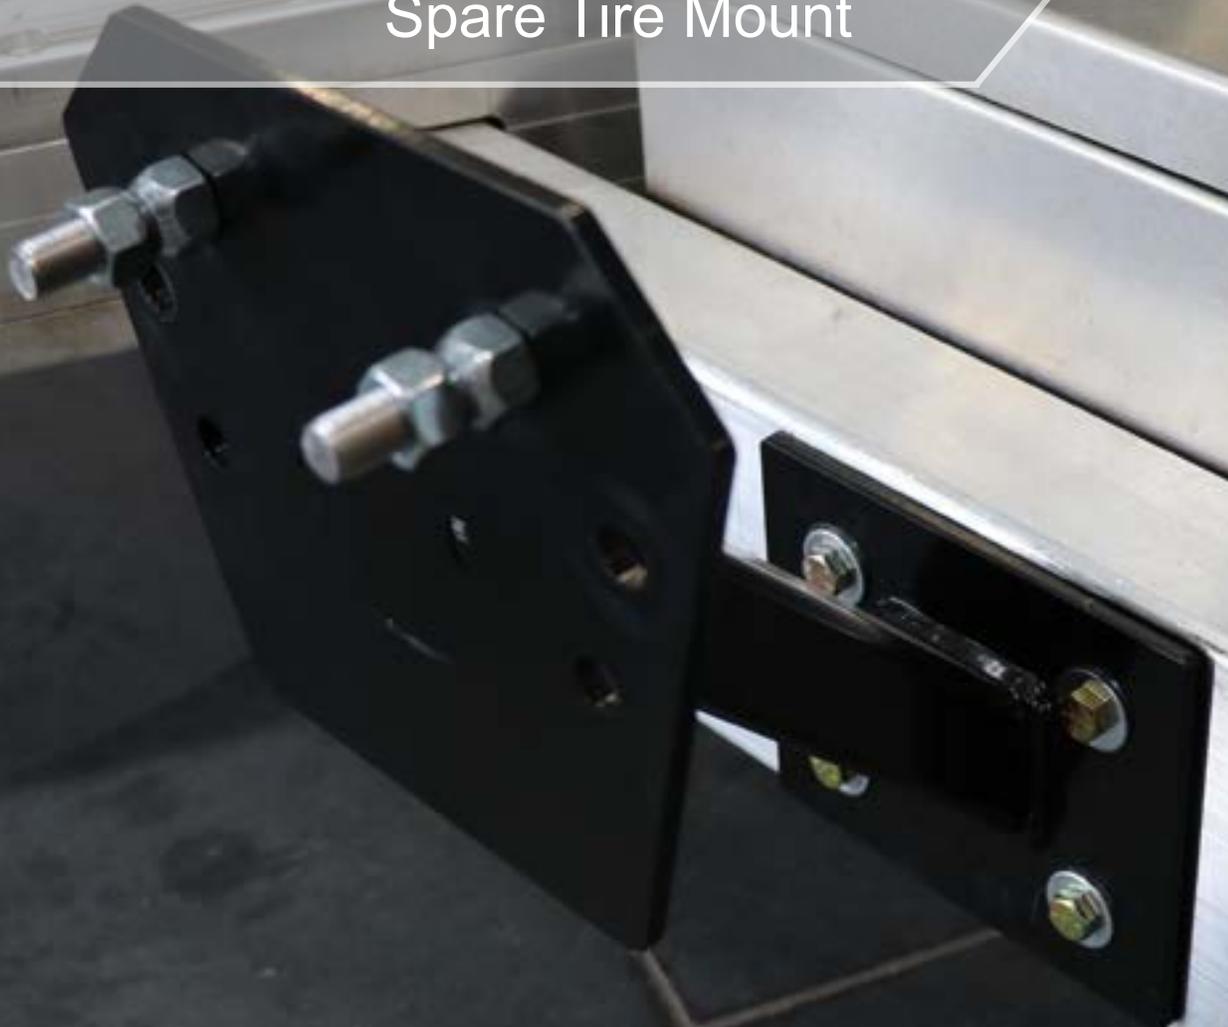

TIMPTE


EQUIPMENT TRAILERS

Congratulations on your recent purchase of the TimpTE Equipment Trailer. Here at TimpTE, we take pride in the quality of our trailers and hope your experience with our company meets all expectations and standards. If at any time you experience issues, please do not hesitate to contact your Authorized Dealer for service or the TimpTE warranty department.



This manual contains information and instructions on the installation of our spare tire mount accessory. Please make sure to read this manual prior to beginning the installation and make sure all safety precautions are followed.

Installation Manual: Spare Tire Mount

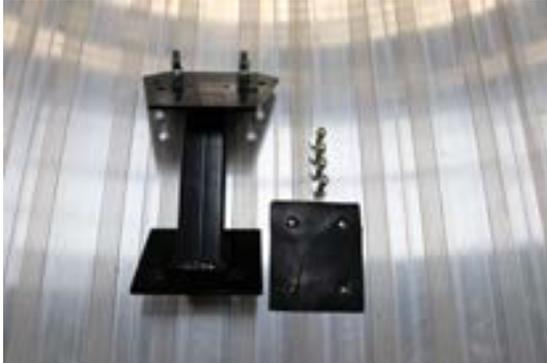

Locate your tire mount kit and verify all items are included:

- Installation print
- Protective fabric spacer
- Tire mount
- Four 3/8 fasteners and washers
- Two 1/2" bolts and lug nuts



Tools needed to complete Installation:

- Tape Measure
- 9/16 wrench or socket and impact drill
- 3/4 wrench or socket and impact drill
- Drill with .386 drill bit



On the curbside of the trailer, take your tape measure and measure 32 1/2" from the edge of the coupler (as shown in picture), and mark a hole approximately 2" from the top edge of the A-frame. Measure a second hole 3" below your first. The third and fourth holes will measure 36 1/2" from the coupler (4" from the first set of holes) and will also be 3" apart. Once complete, the tire mount can be used to verify the marked holes are in the correct locations.

**** Protective eyewear and gloves should be worn during installation process. ****



Place the .386 drill bit into the power drill and drill out the four marked holes.



Next, place the fabric spacer onto the trailer and cover with tire mount. Line up mount/spacer with pre-drilled holes and place a 3/8 fasteners into each hole. The mount should be visually centered and cover most of the A-frame area.



Tighten fasteners using your 9/16 socket and impact drill or ratchet wrench. Complete tightening of all four bolts moving in a clockwise manner to secure tire mount to



On the upper section of the tire mount, place your two 1/2" bolts (bolt head will face the trailer) and tighten for tire placement.



Place spare tire onto mount and fasten 3/4 bolt with a socket until tight to secure the tire.



Once all bolts are tightly secured, your tire mount installation is complete.

TIMPTE

Since 1884