



EZ LOAD DROP DECK, TILT, & DECK OVER SYSTEMS | ALL ALUMINUM CONSTRUCTION

TIMPTE

EQUIPMENT TRAILERS & CAR HAULERS



ABOUT TIMPTE

Timpte has been serving the transportation industry since 1884; longer than any other trailer manufacturer. Headquartered in David City, NE since 1980, our 60-acre campus includes our Corporate Headquarters, Product Showroom, Manufacturing Center, Research & Development Center and Customer Support Center. Timpte is well known for our Super Hopper and Roughneck line of aluminum dry bulk commodity trailers and we're proud to be the #1 selling dry bulk commodity trailer in North America.

As the recognized market leader, Timpte has leveraged our in-depth engineering and manufacturing experience with aluminum — along with our economies of scale — to offer the equipment trailer market a very unique and highly differentiated product line. Timpte's equipment trailers offer the versatility to haul a wide variety of equipment without compromising our high standards for quality and durability. Compared to their steel counterparts, aluminum provides a much lighter empty weight, making our trailers easier to pull and providing higher payload capacity. However, it is how our trailers are manufactured that our distribution partners and valued end-customers notice first. Timpte's use of proprietary extruded aluminum components and mechanically fastened joints provides a much more rugged and durable construction compared to manufacturers that use welds to assemble their trailers. Since these weld seams compromise the strength of the aluminum, they are typically the first areas to crack. Timpte's unique manufacturing capabilities eliminate these potential points of failure.

Timpte's long-term commitment to the equipment trailer business was reinforced in February 2023 with the announcement of a \$22 million investment in a new 190,000 sq. ft. state-of-the-art manufacturing facility to be constructed in Lincoln, NE. The facility will include Timpte equipment trailer manufacturing operations and freight activities along with the Timpte Parts Center (TPC).

The same aftermarket parts supply & warranty support that enabled Timpte to become the #1 selling dry bulk commodity trailer in North America is utilized to support our equipment trailer business. The TPC can quickly process parts orders to ensure timely delivery to our dealers' facilities and our experienced warranty team will work closely with the dealers to diagnose problems and quickly implement the necessary repairs.

Timpte represents American craftsmanship and innovation at its finest. From initial investment through the entire life-cycle ownership experience, Timpte looks forward to working with our distribution partners to ensure our valued end customers enjoy the best transportation solutions available. While this catalog contains our current models of Timpte equipment trailers, we will be broadening our product portfolio with many more models in the near future. Stay tuned!

On behalf of Timpte, thank you for your interest in doing business with us!

Dean R. Powell

Dean R. Powell
Vice President, Commercial Operations
Timpte, Inc.

GENERAL MANAGER



AARON MEAD
amead@timpte.com

REGIONAL SALES MANAGER



BRANDY GREEN
bgreen@timpte.com

REGIONAL SALES MANAGER



MAX ANDLER
mandler@timpte.com

REGIONAL SALES MANAGER



JOE JENKINS
jjenkins@timpte.com

REGIONAL SALES MANAGER



SHAWN CANNON
scannon@timpte.com

REGIONAL SALES MANAGER



LAMONT BRAITHWAIT
lbraithwait@timpte.com

REGIONAL SALES MANAGER



MITCHELL RILEY
mriley@timpte.com

REGIONAL SALES MANAGER



RYAN KRANGES
rkranges@timpte.com

NEW PRODUCT DEVELOPMENT MANAGER



MITCH RILEY
mriley@timpte.com

DEVELOPMENT & VALIDATION MANAGER



SYDNEY GARD
sgard@timpte.com

SENIOR MANUFACTURING LEAD



TOM MAHER
tmaher@timpte.com

ENGINEERING MANAGER



TJ RATHJEN
tjrathjen@timpte.com

WARRANTY



TYLER FOZZARD
tfozzard@timpte.com

QUALITY TECHNICIAN



SHANE STOUFFER
sstouffer@timpte.com

AFTERMARKET TECHNICAL SUPPORT



JESSICA ROREBECK
jrorebeck@timpte.com



WARRANTY CLAIMS

Final end customer must register their equipment trailer online by filling out the form at: timpte.com/equipment-trailer-registration

For all warranty claims please contact our warranty department at 402-367-3056 or email warranty@timpte.com.



BROCHURES & MANUALS

Brochures & manuals can be found at timpte.com or scan the QR code.

MOTORSPORTS SERIES



5K MODELS

512 - 5,000 GVW
12 feet x 78" deck

514 - 5,000 GVW
14 feet x 78" deck



7K MODELS

720 EZ LOAD - 7,000 GVW
19'6" x 82.5" deck



10K MODELS

1020 EZ LOAD - 10,000 GVW
19'6" x 81" deck



POWERHOUSE SERIES



14K MODELS

1420 - 14,000 GVW
16' + 4' x 82-3/8" deck

1424 - 14,000 GVW
18' + 6' x 82-3/8" deck



1420 DECK OVER - 14,000 GVW
16' + 4' x 97-3/4" deck

1424 DECK OVER - 14,000 GVW
20' + 4' x 97-3/4" deck



16K MODELS

1624 - 16,000 GVW
18' Tilt + 6' Fixed x 82-3/8" deck



POWERED EZ LOAD DECK SYSTEM

Raise and lower your deck bed with one push of a button on your wireless remote or use the main switch located in the toolbox. Trailer features a four-degree approach angle and can be loaded or unloaded without the need for ramps. Deter thieves and save space by storing equipment on the trailer in its lowered position while not in use.



ALL ALUMINUM CONSTRUCTION

The extra hauling capacity you want and the strength you need! Mechanically fastened joints replace failure-prone structural aluminum welds. Proprietary extruded aluminum components such as the main c-channel frame, side rails and deck material enable these lightweight trailers to deliver reliable performance that is easy to haul.



WIRELESS REMOTE OPERATION

Raise the trailer from inside or outside your loaded equipment.



| Model | GVW | Usable Deck Size | Empty Weight |
|-------|-------|------------------|----------------|
| 512 | 5,000 | 12' x 78" | Est. 1,140 lbs |
| 514 | 5,000 | 14' x 78" | Est. 1,280 lbs |


| Model | GVW | Usable Deck Size | Empty Weight |
|-------|-------|------------------|----------------|
| 720 | 7,000 | 19' 6" x 82.5" | Est. 1,980 lbs |



| STANDARD SPECIFICATIONS | 512 | 514 |
|-------------------------|---|---|
| Overall Width | 102" | 102" |
| Overall Length | 17' 1" | 19' 1" |
| Tongue Length | 61" | 61" |
| Deck Height | 18" | 18" |
| Loading Angle | 4° | 4° |
| Wheel Size | 15" | 15" |
| Tire Size | ST225/75R15 | ST225/75R15 |
| Axle/Suspension | Torsion | Torsion |
| Brakes | Electric Self Adjusting | Electric Self Adjusting |
| Coupler | 2-5/16" | 2-5/16" |
| Coupler Position | Fixed | Fixed |
| Jack Style | Top Crank | Top Crank |
| Jack Rating | 2,000 lbs. | 2,000 lbs. |
| Tie-Downs | 4 D-Rings (20 Mounting Locations - 8 per side 4 in front) | 4 D-Rings (20 Mounting Locations - 8 per side 4 in front) |
| Lighting | LED | LED |



| STANDARD SPECIFICATIONS | 720 |
|-------------------------|--|
| Overall Width | 102" |
| Overall Length | 24' 5" |
| Tongue Length | 61" |
| Deck Height | 22.5" |
| Loading Angle | 4° |
| Wheel Size | 14" |
| Tire Size | ST205/75R14 |
| Axle/Suspension | Torsion |
| Brakes | Electric Self-Adjusting |
| Coupler | 2-5/16" |
| Coupler Position | Adjustable |
| Jack Style | Top Crank |
| Jack Rating | 2,000 lbs. |
| Tie-Downs | 4 D-Rings (24 Mounting Locations - 10 per side 4 in front) |
| Lighting | LED |

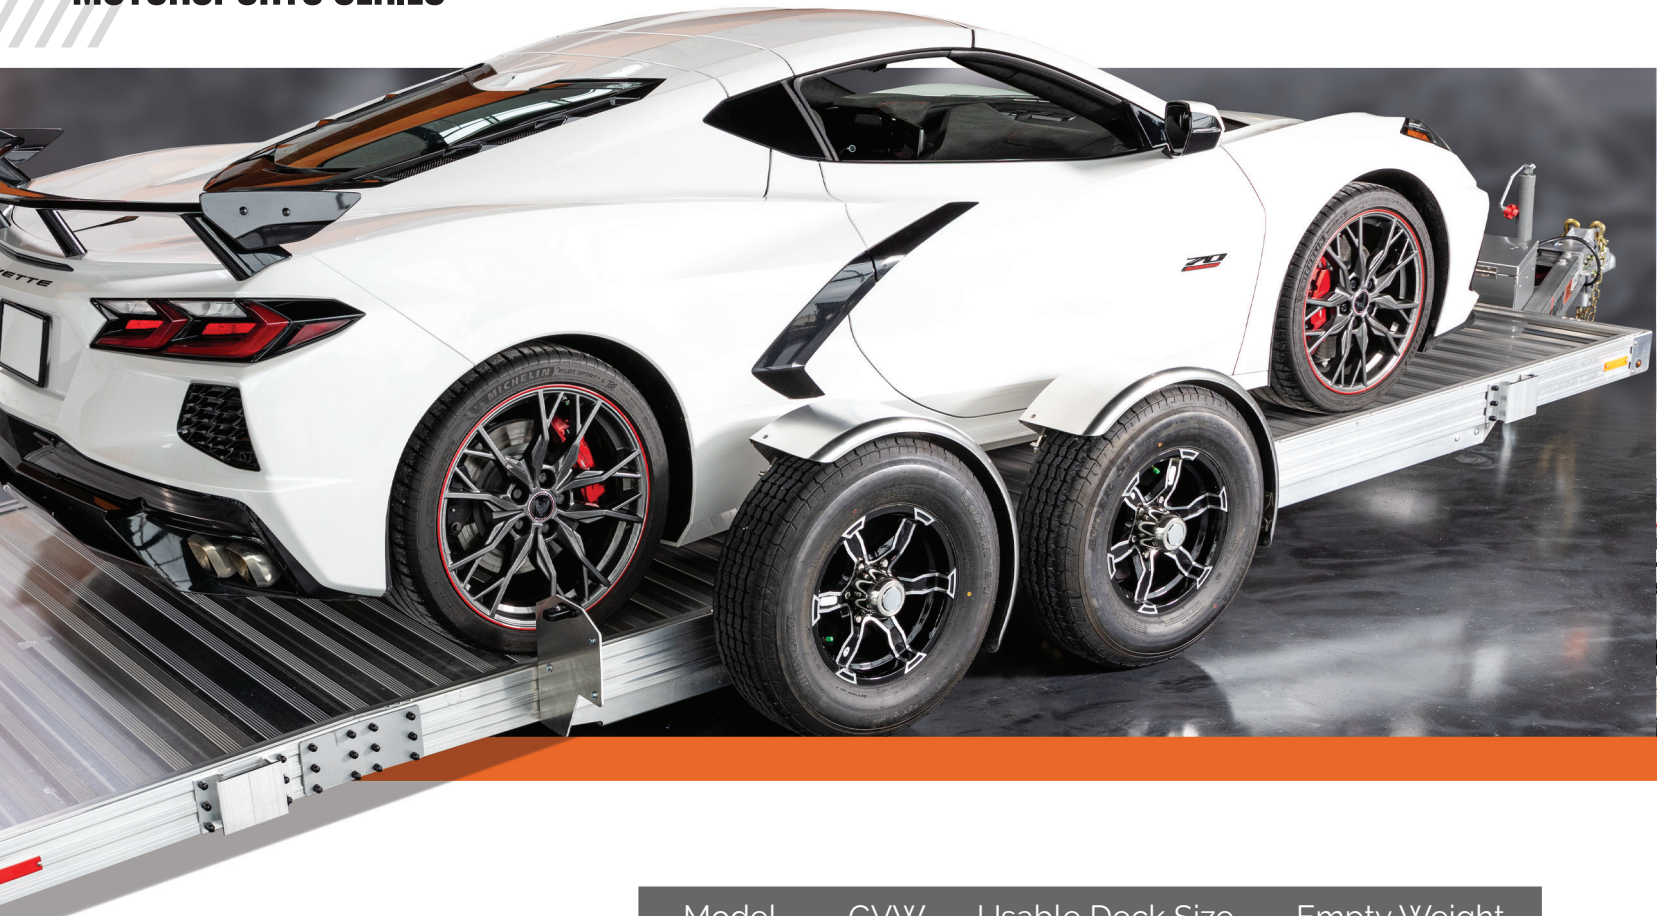

| Model | GVW | Usable Deck Size | Empty Weight |
|-------|--------|------------------|----------------|
| 1020 | 10,000 | 19' 6" x 81" | Est. 2,420 lbs |



| STANDARD SPECIFICATIONS | 1020 |
|-------------------------|--|
| Overall Width | 102" |
| Overall Length | 24' 6" |
| Tongue Length | 61" |
| Deck Height | 24" |
| Loading Angle | 4° |
| Wheel Size | 15" |
| Tire Size | ST225/75R15 |
| Axle/Suspension | Torsion |
| Brakes | Electric Self-Adjusting |
| Coupler | 2-5/16" |
| Coupler Position | Adjustable |
| Jack Style | Side Crank |
| Jack Rating | 2,000 lbs. |
| Tie-Downs | 4 D-Rings (24 Mounting Locations - 10 per side 4 in front) |
| Lighting | LED |
| Stake Pockets | 4 |



SPLIT TILT DECK SYSTEM

Deck is able to be raised and lowered by optimizing an adjustable hydraulic cylinder system to allow for ease of use and safety when loading and unloading equipment without requiring ramps, and gives more control to the operator. Each trailer features a stationary deck for the ability of loading attachments or other forms of equipment.



DECK OVER SYSTEM

Deck is constructed over the wheels, offering optimal load surface and strength. Each trailer features manual spring assist ramps that fold and can be locked in vertical or horizontal position, and concealable sidestep.



ALL ALUMINUM CONSTRUCTION

The extra hauling capacity you want and the strength you need! Mechanically fastened joints replace failure-prone structural aluminum welds. From the main c-channel frame (Split Tilt) or I-Beam (Deck Over), to side rails and deck material, these lightweight trailers deliver reliable performance that is easy to use and operate even in the most severe duty service applications.



| Model | GVW | Usable Deck Size | Empty Weight |
|-------|--------|---------------------|----------------|
| 1420 | 14,000 | 16' + 4' x 82-3/8" | Est. 2,680 lbs |
| 1424 | 14,000 | 18' + 6' x 82- 3/8" | Est. 3,000 lbs |

| STANDARD SPECIFICATIONS | 1420 | 1424 |
|-------------------------|-------------------------|-------------------------|
| Overall Width | 102" | 102" |
| Overall Length | 24' 6" | 28' 6" |
| Stationary Deck Length | 4' | 6' |
| Tilt Deck Length | 16' | 18' |
| Tongue Length | 56" | 56" |
| Deck Height | 22" | 22" |
| Loading Angle | 12° | 11.5° |
| Wheel Size | 16" | 16" |
| Tire Size | ST235/80R16 | ST235/80R16 |
| Axle | Fixed | Fixed |
| Suspension | Rubber Torsion | Rubber Torsion |
| Brakes | Electric Self-Adjusting | Electric Self-Adjusting |
| Coupler | 2-5/16" | 2-5/16" |
| Coupler Position | Adjustable | Adjustable |
| Jack Style | Side Crank | Side Crank |
| Jack Rating | 12,000 lbs. | 12,000 lbs. |
| Stake Pockets | 18 | 18 |
| Lighting | LED | LED |



| Model | GVW | Usable Deck Size | Empty Weight |
|---------|--------|------------------|----------------|
| 1420 DO | 14,000 | 20' x 97-3/4" | Est. 3,200 lbs |
| 1424 DO | 14,000 | 24' x 97-3/4" | Est. 3,500 lbs |

| STANDARD SPECIFICATIONS | 1420 DO | 1424 DO |
|-------------------------|-------------------------|-------------------------|
| Overall Width | 102" | 102" |
| Overall Length | 25' 8" | 29' 8" |
| Tongue Length | 56" | 56" |
| Deck Height | 35" | 35" |
| Loading Angle | 14° | 14° |
| Overall Deck Length | 20' | 24' |
| Dovetail Length | 54" | 54" |
| Wheel Size | 16" | 16" |
| Tire Size | ST235/80R16 | ST235/80R16 |
| Axle | Fixed | Fixed |
| Suspension | Rubber Torsion | Rubber Torsion |
| Brakes | Electric Self-Adjusting | Electric Self-Adjusting |
| Coupler | 2-5/16" | 2-5/16" |
| Coupler Position | Adjustable | Adjustable |
| Jack Style | Side Crank | Side Crank |
| Jack Rating | 12,000 lbs. | 12,000 lbs. |
| Stake Pockets | 12 | 14 |
| Lighting | LED | LED |

POWERHOUSE MODELS



| Model | GVW | Usable Deck Size | Empty Weight |
|-------|--------|--------------------|----------------|
| 1624 | 16,000 | 18' + 6' x 82-3/8" | Est. 3,200 lbs |



| STANDARD SPECIFICATIONS | 1624 |
|-------------------------|-------------------------|
| Overall Width | 102" |
| Overall Length | 29' 1" |
| Tongue Length | 56" |
| Stationary Deck | 6' |
| Tilt Deck | 18' |
| Deck Height | 22" |
| Loading Angle | 12° |
| Wheel Size | 16" |
| Tire Size | ST235/80R16 |
| Axle/Suspension | Torsion |
| Brakes | Electric Self-Adjusting |
| Coupler | 2-5/16" |
| Coupler Position | Adjustable |
| Jack Style | Side Crank |
| Jack Rating | 12,000 lbs. |
| Lighting | LED |
| Stake Pockets | 18 |

TIRE RACK

| PART NO. | DESCRIPTION | UNIT |
|------------|------------------------------------|------|
| 577-303173 | 7L & 10K Torsion Tire Rack | EA |
| 577-302132 | Leaf Spring & 5K Torsion Tire Rack | EA |



SPARE TIRE

| PART NO. | DESCRIPTION | UNIT |
|------------|----------------------|------|
| 035-301822 | 5K & 10K Tire Option | EA |
| 035-301807 | 7K Tire Option | EA |
| 035-301823 | 14K Tire Option | EA |
| 035-302516 | 16K Tire Option | EA |



WHEEL RATCHET STRAP

| PART NO. | UNIT |
|------------|------|
| 035-300569 | EA |



SOLAR PANEL

| PART NO. | UNIT |
|------------|------|
| 575-300504 | EA |



ACCESSORIES MODELS

ROCK GUARD

| PART NO. | DESCRIPTION | UNIT |
|------------|------------------------------------|------|
| 577-303168 | 7L & 10K Torsion Rockguard | EA |
| 577-302023 | Leaf Spring & 5K Torsion Rockguard | EA |



SPARE TIRE MOUNT (INCLUDES HARDWARE)

| PART NO. | DESCRIPTION | UNIT |
|------------|-----------------------------------|------|
| 577-300387 | 5K, 7K, 10K Options | EA |
| 035-301609 | Universal Stake Pocket Tire Mount | EA |



TIE-DOWNS

| PART NO. | DESCRIPTION | UNIT |
|------------|-------------------------|------|
| 035-301453 | L-Track D-Ring Tie Down | EA |




LOADING WINCH KIT - 4,500 LB.

| PART NO. | UNIT |
|------------|------|
| 575-300627 | EA |



STAKE POCKETS

| PART NO. | DESCRIPTION | UNIT |
|------------|-------------|----------|
| 577-300562 | Leaf Spring | One Pair |

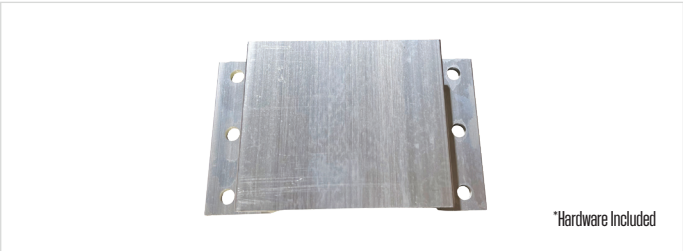


TOOLBOX EXTENSION

| PART NO. | UNIT |
|------------|------|
| 577-300702 | EA |



14K & 16K TOOLBOX

| PART NO. | UNIT |
|------------|------|
| 710-301825 | EA |

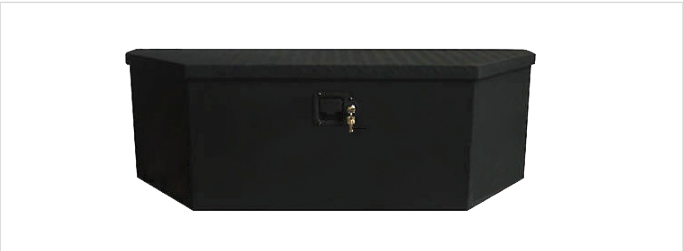

MOTORSPORTS SERIES



7K MODELS - RAMPED FLAT DECK

- 718 RAMPED - 5,000 GVW
12 feet x 78" deck
- 720 RAMPED - 5,000 GVW
14 feet x 78" deck



10K MODELS - RAMPED FLAT DECK

- 1018 RAMPED - 7,000 GVW
19'6" x 82.5" deck
- 1020 RAMPED - 7,000 GVW
19'6" x 82.5" deck



TIMPTE

TIMPTE IS A PROUD MEMBER OF THE
FOLLOWING INDUSTRY ASSOCIATIONS:



TIMPTE IS PLEASED TO OFFER OUR DISTRIBUTION PARTNERS AND VALUED
END-CUSTOMERS FINANCIAL SERVICES FROM THE FOLLOWING RESPECTED COMPANIES:

