

EZ LOAD DROP DECK, TILT, & DECK OVER SYSTEMS | ALL ALUMINUM CONSTRUCTION





EQUIPMENT TRAILERS & CAR HAULERS



Timpte has been serving the transportation industry since 1884; longer than any other trailer manufacturer. Headquartered in David City, NE since 1980, our 60-acre campus includes our Corporate Headquarters, Product Showroom, Manufacturing Center, Research & Development Center and Customer Support Center. Timpte is well known for our Super Hopper and Roughneck line of aluminum dry bulk commodity trailers and we're proud to be the #1 selling dry bulk commodity trailer in North America.

As the recognized market leader, Timpte has leveraged our in-depth engineering and manufacturing experience with aluminum — along with our economies of scale — to offer the equipment trailer market a very unique and highly differentiated product line. Timpte's equipment trailers offer the versatility to haul a wide variety of equipment without compromising our high standards for quality and durability. Compared to their steel counterparts, aluminum provides a much lighter empty weight, making our trailers easier to pull and providing higher payload capacity. However, it is how our trailers are manufactured that our distribution partners and valued end-customers notice first. Timpte's use of proprietary extruded aluminum components and mechanically fastened joints provides a much more rugged and durable construction compared to manufacturers that use welds to assemble their trailers. Since these weld seams compromise the strength of the aluminum, they are typically the first areas to crack. Timpte's unique manufacturing capabilities eliminate these potential points of failure.

Timpte's long-term commitment to the equipment trailer business was reinforced in February 2023 with the announcement of a \$22 million investment in a new 190,000 sq. ft. state-of-the-art manufacturing facility to be constructed in Lincoln, NE. The facility will include Timpte equipment trailer manufacturing operations and freight activities along with the Timpte Parts Center (TPC).

The same aftermarket parts supply & warranty support that enabled Timpte to become the #1 selling dry bulk commodity trailer in North America is utilized to support our equipment trailer business. The TPC can quickly process parts orders to ensure timely delivery to our dealers' facilities and our experienced warranty team will work closely with the dealers to diagnose problems and quickly implement the necessary repairs.

Timpte represents American craftsmanship and innovation at its finest. From initial investment through the entire life-cycle ownership experience, Timpte looks forward to working with our distribution partners to ensure our valued end customers enjoy the best transportation solutions available. While this catalog contains our current models of Timpte equipment trailers, we will be broadening our product portfolio with many more models in the near future. Stay tuned!

On behalf of Timpte, thank you for your interest in doing business with us!

Sean K. Powell

Dean R. Powell Vice President, Commercial Operations Timpte, Inc.

MEET THE TEAM

GENERAL MANAGER



AARON MEAD amead@timpte.com

CUSTOMER SERVICE REPRESENTATIVE



JESSICA ROREBECK jrorebeck@timpte.com

WARRANTY



TYLER FOZZARD tfozzard@timpte.com

REGIONAL SALES MANAGER



MAX ANDLER mandler@timpte.com

NEW PRODUCT DEVELOPMENT MANAGER



MITCH RILEY mriley@timpte.com

OUALITY TECHNICIAN



SHANE STOUFFER sstouffer@timpte.com

REGIONAL SALES MANAGER



JOE JENKINS ijenkins@timpte.com

DEVELOPMENT & VALIDATION MANAGER



SYDNEY GARD sgard@timpte.com

REGIONAL SALES MANAGER



SHAWN CANNON scannon@timpte.com

SENIOR MANUFACTURING LEAD



TOM MAHER tmaher@timpte.com

REGIONAL SALES MANAGER



LAMONT BRAITHWAIT lbraithwait@timpte.com

ENGINEERING MANAGER



TJ RATHJEN tjrathjen@timpte.com



WARRANTY CLAIMS

Final end customer must register their equipment trailer online by filling out the form at:
Timpte.com/equipment-trailer-registration

For all warranty claims please contact our warranty department at 402-367-3056 or email warranty@timpte.com.



BROCHURES & MANUALS

Brochures & manuals can be found at timpte.com or scan the QR code.

MOTORSPORTS SERIES





POWERED EZ LOAD DECK SYSTEM

Raise and lower your deck bed with one push of a button on your wireless remote or use the main switch located in the toolbox. Trailer features a four-degree approach angle and can be loaded or unloaded without the need for ramps. Deter thieves and save space by storing equipment on the trailer in its lowered position while not in use.



ALL ALUMINUM CONSTRUCTION

The extra hauling capacity you want and the strength you need! Mechanically fastened joints replace failure-prone structural aluminum welds. Proprietary extruded aluminum components such as the main c-channel frame, side rails and deck material enable these lightweight trailers to deliver reliable performance that is easy to haul.



WIRELESS REMOTE OPERATION

Raise the trailer from inside or outside your loaded equipment.







STANDARD SPECIFICATIONS	512	514
Overall Width	102"	102"
Overall Length	17' 1"	19' 1"
Tongue Length	61"	61"
Deck Height	18"	18"
Loading Angle	4°	4°
Wheel Size	15"	15"
Tire Size	ST225/75R15	ST225/75R15
Axle/Suspension	Torsion	Torsion
Brakes	Electric Self Adjusting	Electric Self Adjusting
Coupler	2-5/16"	2-5/16"
Coupler Position	Fixed	Fixed
Jack Style	Top Crank	Top Crank
Jack Rating	2,000 lbs.	2,000 lbs.
Tie-Downs	4 D-Rings (20 Mounting Locations - 8 per side 4 in front)	4 D-Rings (20 Mounting Locations - 8 per side 4 in front)
Lighting	LED	LED

MOTORSPORTS SERIES




Model	GVW	Usable Deck Size	Empty Weight
720	7,000	19' 6" x 82.5"	Est. 1,980 lbs





STANDARD SPECIFICATIONS	720
Overall Width	102"
Overall Length	24' 5"
Tongue Length	61"
Deck Height	22.5"
Loading Angle	4°
Wheel Size	14"
Tire Size	ST205/75R14
Axle/Suspension	Torsion
Brakes	Electric Self-Adjusting
Coupler	2-5/16"
Coupler Position	Adjustable
Jack Style	Top Crank
Jack Rating	2,000 lbs.
Tie-Downs	4 D-Rings (24 Mounting Locations - 10 per side 4 in front)
Lighting	LED

MOTORSPORTS SERIES

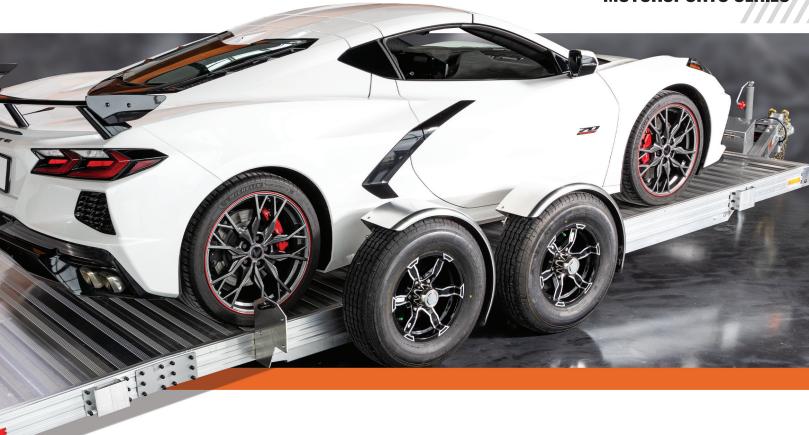







STANDARD SPECIFICATIONS	1020
Overall Width	102"
Overall Length	24' 6"
Tongue Length	61"
Deck Height	24"
Loading Angle	4°
Wheel Size	15"
Tire Size	ST225/75R15
Axle/Suspension	Torsion
Brakes	Electric Self-Adjusting
Coupler	2-5/16"
Coupler Position	Adjustable
Jack Style	Side Crank
Jack Rating	2,000 lbs.
Tie-Downs	4 D-Rings (24 Mounting Locations - 10 per side 4 in front)
Lighting	LED
Stake Pockets	4







ı	Model	GVW	Usable Deck Size	Empty Weight
	718	7,000	18' x 82.5"	Est. 1,580 lbs
	720	7,000	20' x 82.5"	Est. 1,760 lbs
		_		

STANDARD SPECIFICATIONS	718 Ramped Flat	720 Ramped Flat
Overall Width	102"	102"
Overall Length	23' 2"	25' 2"
Tongue Length	57"	57"
Deck Height	24"	24"
Loading Angle	18°	18°
Wheel Size	14"	14"
Tire Size	ST205/75R14	ST205/75R14
Axle/Suspension	Torsion	Torsion
Brakes	Electric Self-Adjusting	Electric Self-Adjusting
Coupler	2-5/16"	2-5/16"
Coupler Position	Fixed	Fixed
Jack Style	Side Crank	Side Crank
Jack Rating	3,000 lbs.	3,000 lbs.
Tie-Downs	(4) D-Rings in Deck, (4) D-Rings in L-Track	(4) D-Rings in Deck, (4) D-Rings in L-Track
Lighting	LED	LED







Model	GVW	Usable Deck Size	Empty Weight
1018	10,000	18' x 82.5"	Est. 1,900 lbs
1020	10,000	20' x 82.5"	Est. 2,040 lbs

STANDARD SPECIFICATIONS	1018 Ramped Flat	1020 Ramped Flat
Overall Width	102"	102"
Overall Length	23' 2"	25' 2"
Tongue Length	57"	57"
Deck Height	25"	25"
Loading Angle	1 9°	19°
Wheel Size	15"	15"
Tire Size	ST225/75R15	ST225/75R15
Axle/Suspension	Torsion	Torsion
Brakes	Electric Self-Adjusting	Electric Self-Adjusting
Coupler	2-5/16"	2-5/16"
Coupler Position	Fixed	Fixed
Jack Style	Side Crank	Side Crank
Jack Rating	3,000 lbs.	3,000 lbs.
Tie-Downs	(4) D-Rings in Deck, (4) D-Rings in L-Track	(4) D-Rings in Deck, (4) D-Rings in L-Track
Lighting	LED	LED







Model	GVW	Usable Deck Size	Empty Weight
718	7,000	18' x 82.5"	Est. 1,580 lbs
720	7,000	20' x 82.5"	Est. 1,760 lbs

STANDARD SPECIFICATIONS	718 Beavertail	720 Beavertail
Overall Width	102"	102"
Overall Length	23' 2"	25' 2"
Beavertail Length	24"	24"
Tongue Length	57"	57"
Deck Height	24"	24"
Loading Angle	14°	14°
Wheel Size	14"	14"
Tire Size	ST205/75R14	ST205/75R14
Axle/Suspension	Torsion	Torsion
Brakes	Electric Self-Adjusting	Electric Self-Adjusting
Coupler	2-5/16"	2-5/16"
Coupler Position	Fixed	Fixed
Jack Style	Side Crank	Side Crank
Jack Rating	3,000 lbs.	3,000 lbs.
Tie-Downs	(4) D-Rings in Deck, (4) D-Rings in L-Track	(4) D-Rings in Deck, (4) D-Rings in L-Track
Lighting	LED	LED







Model	GVW	Usable Deck Size	Empty Weight
1018	10,000	18' x 82.5"	Est. 1,900 lbs
1020	10,000	20' x 82.5"	Est. 2,040 lbs

STANDARD SPECIFICATIONS	1018 Beavertail	1020 Beavertail
Overall Width	102"	102"
Overall Length	23' 2"	25' 2"
Beavertail Length	24"	24"
Tongue Length	57"	57"
Deck Height	25"	25"
Loading Angle	15°	15°
Wheel Size	15"	15"
Tire Size	ST225/75R15	ST225/75R15
Axle/Suspension	Torsion	Torsion
Brakes	Electric Self-Adjusting	Electric Self-Adjusting
Coupler	2-5/16"	2-5/16"
Coupler Position	Fixed	Fixed
Jack Style	Side Crank	Side Crank
Jack Rating	3,000 lbs.	3,000 lbs.
Tie-Downs	(4) D-Rings in Deck, (4) D-Rings in L-Track	(4) D-Rings in Deck, (4) D-Rings in L-Track
Lighting	LED	LED

POWERHOUSE MODELS





SPLIT TILT DECK SYSTEM

Deck is able to be raised and lowered by optimizing an adjustable hydraulic cylinder system to allow for ease of use and safety when loading and unloading equipment without requiring ramps, and gives more control to the operator. Each trailer features a stationary deck for the ability of loading attachments or other forms of equipment.



DECK OVER SYSTEM

Deck is constructed over the wheels, offering optimal load surface and strength. Each trailer features manual spring assist ramps that fold and can be locked in vertical or horizontal position, and concealable sidestep.



ALL ALUMINUM CONSTRUCTION

The extra hauling capacity you want and the strength you need! Mechanically fastened joints replace failure-prone structural aluminum welds. From the main c-channel frame (Split Tilt) or I-Beam (Deck Over), to side rails and deck material, these lightweight trailers deliver reliable performance that is easy to use and operate even in the most severe duty service applications.







Model	GVW	Usable Deck Size	Empty Weight
1420	14,000	16' + 4' x 82-3/8"	Est. 2,680 lbs
1424	14,000	18' + 6' x 82- 3/8"	Est. 3,000 lbs

STANDARD SPECIFICATIONS	1420	1424
Overall Width	102"	102"
Overall Length	24' 6"	28' 6"
Stationary Deck Length	4'	6'
Tilt Deck Length	16'	18'
Tongue Length	56"	56"
Deck Height	22"	22"
Loading Angle	12°	11.5°
Wheel Size	16"	16"
Tire Size	ST235/80R16	ST235/80R16
Axle	Fixed	Fixed
Suspension	Rubber Torsion	Rubber Torsion
Brakes	Electric Self-Adjusting	Electric Self-Adjusting
Coupler	2-5/16"	2-5/16"
Coupler Position	Adjustable	Adjustable
Jack Style	Side Crank	Side Crank
Jack Rating	12,000 lbs.	12,000 lbs.
Stake Pockets	18	18
Lighting	LED	LED

POWERHOUSE MODELS

POWERHOUSE MODELS









STANDARD SPECIFICATIONS	1420 DO	1424 DO
Overall Width	102"	102"
Overall Length	25' 8"	29' 8"
Tongue Length	56"	56"
Deck Height	35"	35"
Loading Angle	14°	14°
Overall Deck Length	20'	24'
Dovetail Length	54"	54"
Wheel Size	16"	16"
Tire Size	ST235/80R16	ST235/80R16
Axle	Fixed	Fixed
Suspension	Rubber Torsion	Rubber Torsion
Brakes	Electric Self-Adjusting	Electric Self-Adjusting
Coupler	2-5/16"	2-5/16"
Coupler Position	Adjustable	Adjustable
Jack Style	Side Crank	Side Crank
Jack Rating	12,000 lbs.	12,000 lbs.
Stake Pockets	12	14
Lighting	LED	LED

POWERHOUSE MODELS



Model	GVW	Usable Deck Size	Empty Weight
1624	16,000	18' + 6' x 82-3/8"	Est. 3,200 lbs





STANDARD SPECIFICATIONS	1624
Overall Width	102"
Overall Length	29' 1"
Tongue Length	56"
Stationary Deck	6'
Tilt Deck	18'
Deck Height	22"
Loading Angle	12°
Wheel Size	16"
Tire Size	ST235/80R16
Axle/Suspension	Torsion
Brakes	Electric Self-Adjusting
Coupler	2-5/16"
Coupler Position	Adjustable
Jack Style	Side Crank
Jack Rating	12,000 lbs.
Lighting	LED
Stake Pockets	18

ACCESSORIES

TIRE RACK

PART NO.	DESCRIPTION	UNIT
577-303030	7K & 10K Torsion - Gun Metal Gray	EA
577-303173	7K & 10K Torsion	EA
577-303044	Leaf Spring & 5K Torsion - Gun Metal Gray	EA
577-302132	Leaf Spring & 5K Torsion	EA



ROCK GUARD

PART NO.	DESCRIPTION	UNIT
577-303025	7K & 10K Torsion - Gun Metal Gray	EA
577-303168	7K & 10K Torsion	EA
577-303041	Leaf Spring & 5K Torsion - Gun Metal Gray	EA
577-302023	Leaf Spring & 5K Torsion	EA



SPARE TIRE

PART NO.	DESCRIPTION	UNIT
035-301822	5K & 10K Tire Option	EA
035-301807	7K Tire Option	EA
035-301823	14K Tire Option	EA
035-302516	16K Tire Option	EA

SPARE TIRE MOUNT (INCLUDES HARDWARE)

PART NO.	DESCRIPTION	UNIT
577-300387	5K, 7K, 10K Options	EA
577-301625	Universal Stake Pocket Tire Mount	EA



WHEEL RATCHET STRAP

PART NO.	UNIT
035-300569	EA
	*Logistics track required

TIE-DOWNS


PART NO.	DESCRIPTION	UNIT
035-301453	L-Track D-Ring Tie Down	EA
		*1,7251b rating

ACCESSORIES

SOLAR PANEL




LOADING WINCH KIT - 4,500 LB.

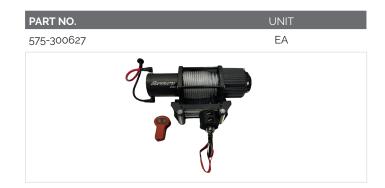

STAKE POCKETS



14K & 16K TOOLBOX

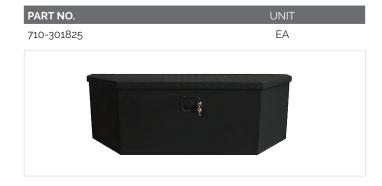

TOOLBOX EXTENSION







TIMPTE IS A PROUD MEMBER OF THE FOLLOWING INDUSTRY ASSOCIATIONS:

TIMPTE IS PLEASED TO OFFER OUR DISTRIBUTION PARTNERS AND VALUED END-CUSTOMERS FINANCIAL SERVICES FROM THE FOLLOWING RESPECTED COMPANIES:









