TIMPTE SUPER HOPPER

#1 SELLING DRY BULK COMMODITY TRAILER IN NORTH AMERICA



MADE IN AMERICA

Nobody pulls their weight like we do.

About Us

Timpte® has been manufacturing bulk grain/commodity trailers for over 140 years. As one of the pioneers in the development of these trailers, we have positioned ourselves to serve your needs today and in the future.

Timpte trailers are designed for those who require the best. We design strength and performance into each new Timpte, but that's only part of our story. Timpte's insistence on using only the finest materials is further assurance of unsurpassed value. We use only the highest quality aluminum and steel in our construction.

The engineering and design leadership that goes into each Timpte trailer shows in our distinctive good looks, craftsmanship, structural detail and the methods by which Timpte trailers are produced. Value comes from Timpte's tradition of quality.

We are recognized throughout the bulk commodity transportation industry as the leader in quality. To understand what trailer value is all about, take a look at a new Timpte. There's a reason we are the #1 manufacturer of bulk commodity trailers in the country.



Design

Our diversified engineering team develops, designs and tests each new product from start to finish. They have the ability to handle any request to get you the trailer you want.

Manufacture

We custom build every trailer in one manufacturing facility which provides you with consistent product quality that's built on time.

Sell

We give you expert advice on how to increase your operation's productivity and the confidence that you're getting the right trailer that fits your needs.

Service

With more than 40 locations in the United States & Canada, Timpte's extensive network means you're never too far from Timpte genuine parts and service.



Standard Features

1. **Side Panels:**
.063" aluminum panels are used in high stress areas for added strength and durability.
(2) .063" panels on 38' - 43'
(3) .063" panels on 48' - 50'

   - 4' Exterior Side Panels: A long time Timpte trademark that offers unmatched strength and ease of repair.

2. **Electric Tarp System:**

THUNDER 7000 POWER TARP SYSTEM

Standard with the Thunder 7000 Series Electric Tarp in mill finish. This dual-arm tarping system features One-Touch technology, a 100% American-made motor, and a new multi-function remote keypad. See page 13 for more details.

3. **Air Ride Dump Valve & Oil Filled Pressure Gauge:**
Relocated to the nose of the trailer where it is immediately accessible to the operator on all trailers.
**Does not apply to tri-axle trailers with lift axle(s).*

4. **Tarp System Keypad:**
The new One-Touch Tarp Keypad, conveniently mounted on the front of the trailer, lets you open and close your tarp system with the touch of a button.

5. **Lights & Electrical:**
All weather-pack automotive style connections, sealed to prevent corrosion. Standard light configuration:

   - 2 rows of 3 LED bullet lights with center mid-ship turn signal.
   - (2) Front high-mount LED bullet lights
   - (5) Rear high-mount marker LED bullet lights
   - (6) 4" diameter stop/turn signal LED bullet lights
   - Extra spacing (standard)

6. **Stainless Steel Corners:**
Timpte traps are made of 1/4" aluminum plate with hat section stiffeners to minimize deflection. Each door rides on sealed HD 40 mm diameter roller bearings designed to give years of trouble free service. Roller bearings feature lifetime warranty to original trailer owner.




***The trailer shown above is used for DEMONSTRATION purposes only. All referenced points are standard features on all Timpte models.**

Timpte reserves the right to change design or specifications without notice. Information contained herein is general in nature and is not intended for specific applications purposes.

Timpte's value comes from our tradition of quality.

More standard features from front to back than any other trailer manufacturer.



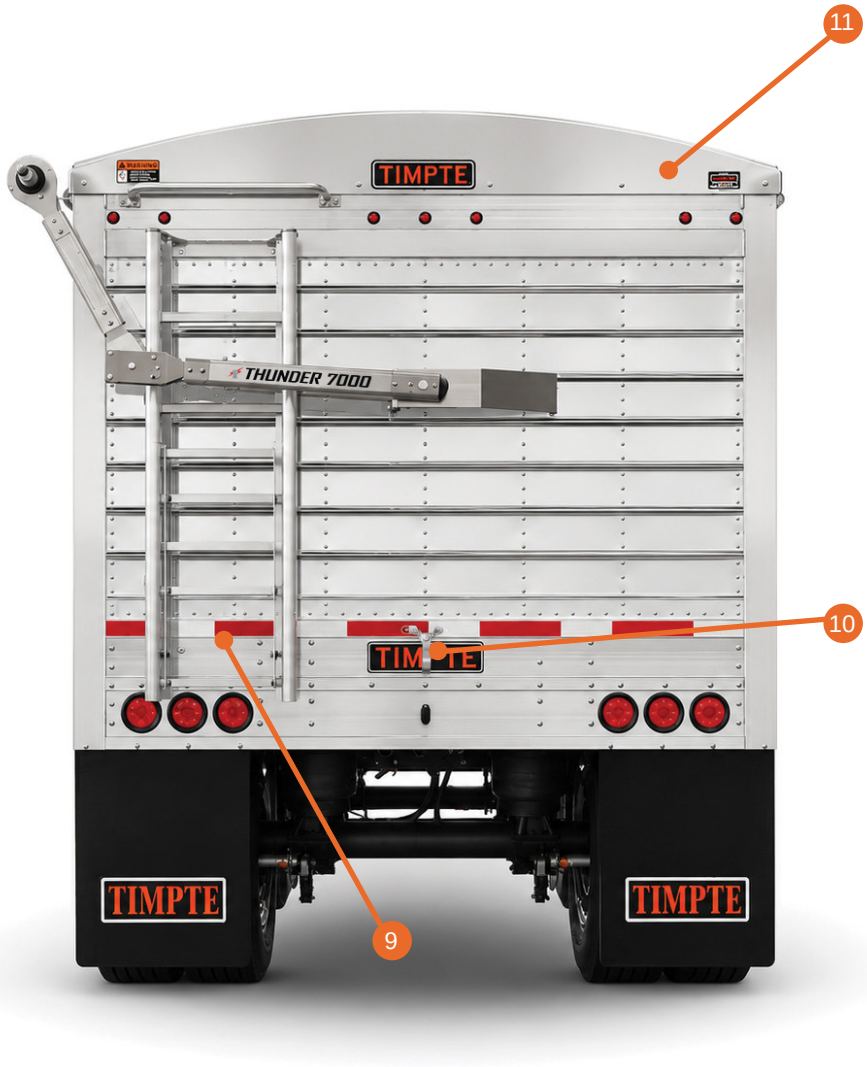

7. **Tarp:**
   ThunderArmor
   New 123" width 18 oz. one-piece premium-grade woven PVC.

8. **Trap System:**
   Timpte traps are made of 1/4" aluminum plate with hat section stiffeners to minimize deflection. Each door rides on sealed HD 40 mm diameter roller bearings designed to give years of trouble free service. Note the interior trap door seal protects against moisture intrusion.

9. **Access System:**
   Standard with front and rear aluminum ladders and 26" rear grab bar.

   - Standard Flip Step Ladder: The Timpte Original! A functional ladder extension that stores in the upward position and is swung down to provide unequaled rear access and safety.

10. **Removable Crank Handle Retainer:**
    Standard on all trailers gives the ability to remove the crank handle retainer when not in use.

11. **Tarp Bows:**
    Heavy duty extruded aluminum box design top rail eliminates having to use fixed structural tarp bows. Timpte tarp bows are easily replaced if damaged. 2 ridge straps are standard.

PEACE OF MIND 3 YEARS WARRANTY

Timpte offers an industry leading 3 year "Peace of Mind No Hassle Warranty" on all new trailers.

Visit timpte.com/learn-more/owners for full warranty details.

Super Hopper Models

Standard Hoppers

Lengths - 21'-11", 28'-6", 33'-5", 36', 38', 40' and 42'-2"
Widths - 96" and 102" (22'-11" - Only available in 96" wide)



Super Cube

Lengths - 43' Only
Width - 96" and 102"



Spread-Axle Models

Lengths - 48' and 50'
Widths - 96" and 102"



Tri-Axle Models

Lengths - 48' and 50'
Widths - 96" and 102"



SL Standard Models

Lengths - 40' and 42'-2"
Width - 96"
Height - 66" and 72"



SL Tri-Axle Models

Length - 50'
Width - 96"
Height - 72"



Lead & Pup

Lengths - Lead 28'-6" 33'-5", 36', 38', 40', 42'-2", 43', 48' and 50'
Pup 25'-6", 21'-11" and 18'
Widths - 96" and 102"



Tri-Axle Doubles

Lengths - Lead 36'-10"
Pup 36'-10"
Widths - 102"



*Trailers pictured represent model types from different model years and may not represent the current models available.

Standard Specifications

Application
Recommended for transportation of agricultural and industrial bulk commodities

Tires
Eight (8) 11R24.5 radials

Axles
2,500 lbs. beam capacity, 5 3/4" diameter, 71-1/2" or 77-1/2" track, 28-spline camshafts with cam tubes. Standard brake lining

Hub & Drum
Lightweight hub & dum

Brakes
16-1/2" x 7" complying with FMVSS 121

Anti-Lock System
4 sensor, 2 modulator with constant power supplied by center auxiliary pin. Exceeds the minimum requirements of FMVSS 121, S5.5

Suspension
Air Ride Suspension, 17" ride height with 23,000 lbs. rating

Support Legs
Aluminum square legs, with roadside removable crank, low profile 10" square cushion foot shoe. 50,000 lbs. lift capacity. Located from king pin: 77" on 22'; 88 5/8" on 28'6"; 94" on 33'5", 36', 38', 40', 42'2", 43'; 98" on 48'; 110" on 50'

Wheel Flaps
Black heavy duty rubber, 24"W x 30"L

King Pin Setting
20" - Single I-beam with 3/8" steel flanges, 1/4" steel full-width pickup plate

Front Corners
6" radius with stainless steel corner overlays; SL Model 3" x 4-1/2" rectangular tube, stainless steel, 15 degree rearward slant assembly

Nose Panels
Smooth pre-painted white .063" aluminum

Side Lower Rails
Aluminum 9-11/16" high extrusion

Side Posts
Aluminum extrusion 1-3/4" Z posts on 12" centers

Side Panels
Pre-painted white .048" and .063" in coupler area aluminum corrugated on 6" centers

Side Top Rails
Aluminum 5-5/8" x 6-1/4" extrusion

Interior Lining Sidewalls
.048" one piece aluminum

Divider Panel
.080" Aluminum

Metal Coating
Black protective coating on all steel parts

Tarp
123" ThunderArmor 18oz. one-piece tarp

Tarp Opener
Thunder 7000 electric tarp opener system with One-Touch™ control and rf remote

Tarp Bows
9" rise galvanized steel arch type; Four (4) on 22'; Six (6) on 28'6", 33'5"; Seven (7) on 36', 38', 40'; Eight (8) on 42'2", 43'; Nine (9) on 48', 50'

Rear Frame
Corrugated pre-painted white .048" aluminum panels and extruded posts: SL Model - Corrugated pre-painted white .048" aluminum and 3" x 4-1/2" rectangular tube, mill finish aluminum 15 degree forward slant assembly

End Slope
.080" aluminum supported 'Z' shaped members; 33 degree slope angle; SL Models - 33 degree front and rear slope angle. 31 degree rear slope on tri-axle models

Twin Hopper Assembly
22', 28'6", 33'5", 36', 38', 40', 42'2" - 96"W or 102"W on select models - Two piece .125" aluminum formed tubs with 35.8 degree side slopes and 33 degree end slopes, ag tub design
43" - 96"W or 102"W / 48', 50' - 96"W or 102"W; two piece .125" aluminum formed tubs with 43.5 degree side slopes and 33 degree end slopes, split tub design

Traps
Trap plates are 1/4" aluminum with steel stiffeners supported by double sealed steel ball bearings
22' - 24"W x 36"L;
Hopper Clearance 25"
28'6", 33'5" - 24"W x 22"L;
Hopper Clearance 25"
36', 38', 40', 42'2" - 24"W x 27"L;
Hopper Clearance 25"
43', 48', 50' - 26"W x 54"L;
Hopper Clearance 17"
102"W trailers add 6" to trap width

Trap Operators
Each trap is opened and closed by a manually operated 1" diameter shaft connected through a u-joint to the double rack and pinion gears using a removable crank. There are trap locks at each crankshaft. The double rack and pinion gears drive at both sides of each trap plate

Access System
Aluminum ladders are mounted on both the front and the rear, with a flip down step mounted to the base of the rear ladder. Grab handle mounted above the rear ladder

Electrical System
Complies with FMVS 108 with connector 10" offset to roadside on nose. All weather-pack automotive style connections are sealed to prevent water intrusion and corrosion.

Side & Nose Markers Clearance & ID Lamps
Side Lamps - (Bullet Style) 3 amber LED, 2 red LED, and 1 amber mid-turn/marker lamp in 2 rows of 3 lamps per side, extra spacing
Nose Lamps - (Bullet Style) 2 high-mounted amber LED clearance lamps
Rear Lamps - (Bullet Style) 3 high-mounted red LED ID lamps and 2 high-mounted red LED clearance lamps on the rear frame header

Rear Tail Lamps
(6) 4" diameter, 6-diode red LED lamps, grommet mounted - two red turn signals and four red stop/tail lamps

Conspicuity
Red and white reflective tape mounted in conspicuity track of lower rail and full width across rear of trailer. White reflective tape mounted on top corners of rear frame

Popular Options

Front Options



Front Splash Guards



Landing Gear Mud Flaps



Stainless Steel Nose



Double Split Platforms



Front Aluminum Enclosure

Rear Options



TireMaxx Pro Inflation/ Deflation System



Full Width Aluminum Step



Hendrickson ADB System (Dust Shields Included)




Stainless Steel Rear



Rear Aluminum Enclosure

Tarp Options

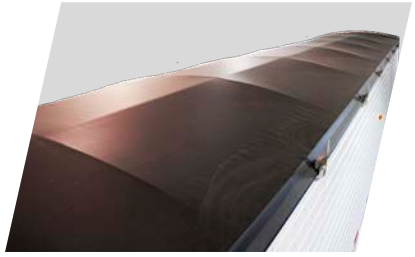

22 oz. Tarp



Custom Tarp Colors



Clean Coat Acrylic Tarp



Thunder Tarp Straps



Enclosed Tarp Caps

Tub Configurations


Tub Styles



Ag Hopper - 25" Ground Clearance
96W Trailer – 24"W x 27"L
102W Trailer – 30"W x 27"L



Hi-Flow - 20.5" Ground Clearance
96W Trailer - 32"W x 36"L
102W Trailer - 32"W x 54"L

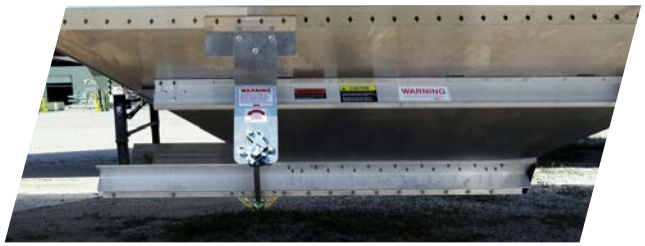

Split Tub - 17" Ground Clearance
96W Trailer – 26"W x 36"L OR 26"W x 54"L
102W Trailer – 32"W x 36"L OR 32"W x 54"L

Tub Options



Removable Vibrators



Permanent Vibrators



Knock Rails



Sight Glass Window

Door Options



Single Speed Operator
(Direct Drive)



Two-Speed Operator
(Gear Drive)



Gravity Flow
(Belt Drive)



EZ Flow
(Hydraulic Drive)

Panel Options & Sidewall Heights

ALUMINUM DOUBLE-WALL HOPPER BOTTOM TRAILERS

Sidewall Heights

Sidewall Heights available:

66”	90”
72”	96”
78”	102”
84”	

Sidewall Panel Options



White | Black | Gunmetal Gray | Platinum Silver | Stainless Steel

*Other Colors Available Upon Request

Colors shown may vary from actual



Light Options

Side Marker Lights



Bullet Lights (Standard)



Box Style Lights (Optional)



Clear Bullet Lights (Optional)



Clear Box Style Lights (Optional)



Marker Lights



Marker Lights


Tail Lights



Standard Lights



Clear Lights (Optional)



Rear Backup Light (Optional)

Work Lights



Apex



Interior Tubs

optronics

Available Side Marker LED Light Configurations:

1 row of 3/5/9/13/15/17
2 rows of 3 (Standard)
2 rows of 5/9/13/15/17
3 rows of 3/5/9/13/15/17
* Classic Spacing available
* Configuration options vary depending on length of trailer



LIGHTS



WIRING HARNESS

Rear Light Options



3 LED Light Cluster on Lower Bumper Rail



7 LED Lights on Rear Header
4 Outside Lights Turn/Clearance
3 Inside Lights Stop/Clearance



Rear Corner Post Lights

Lightweight Options

Tandem Axle Aluminum Subframe

- Available with front lift axle
- Increased wall thickness of long beams by 25%

WEIGHT SAVINGS

Weight Savings (up to): 1,900lbs

Trailer as light as: 7,400lbs



Weight Saving Options

Fig.	Super Light Option	96" Wide	102" Wide
A.	Aluminum Upper Coupler	435 lbs.	470 lbs.
B.	(4) Aluminum Wheels / 22.5 Wide Base Tires	633 lbs.	633 lbs.
C.	Aluminum Subframe	284 lbs.	284 lbs.
D.	Lightweight Hubs (Std) & Drums	132 lbs.	132 lbs.



Fig. A



Fig. B



Fig. C



Fig. D



ALCOA

Aluminum Wheel Options


Wheel Size	Finish
24.5 x 8.25	Ultra ONE® / Dura-Bright®
22.5 x 8.25	Ultra ONE® / Dura-Bright®
22.5 x 14	Ultra ONE® / Dura-Bright®

Electric Tarp / Thunderstone manufacturing LLC

THUNDER POWER TARP SYSTEMS

Technology Behind the Product

- New wireless remote design with an ergonomic, easy-to-use transmitter.
- One-Touch Technology opens or closes the tarp system with a single press of a button.
- Open, close, and stop the tarp with the touch of a button.
- Automatic power-on when tractor power is supplied, with manual power-off available at the keypad.
- The wireless remote automatically powers on when the lid is opened and powers off when closed, helping extend battery life.
- Waterproof keyapd and weather-resistant wireless remote designed to withstand tough operating conditions.
- Up to 1,600 ft. wireless range in ideal conditions for reliable long-distance operation.
- Powered by (2) premium non-rechargeable lithium AAA batteries for maximum battery life, reliable hot/cold-weather performance, leak resistant operation, and easy replacement.
- Automatic remote shut-off after 10 minutes of inactivity to help preserve battery life.
- One-Touch Technology measures motor amperage to automatically stop at the correct torque, helping protect the tarp system.

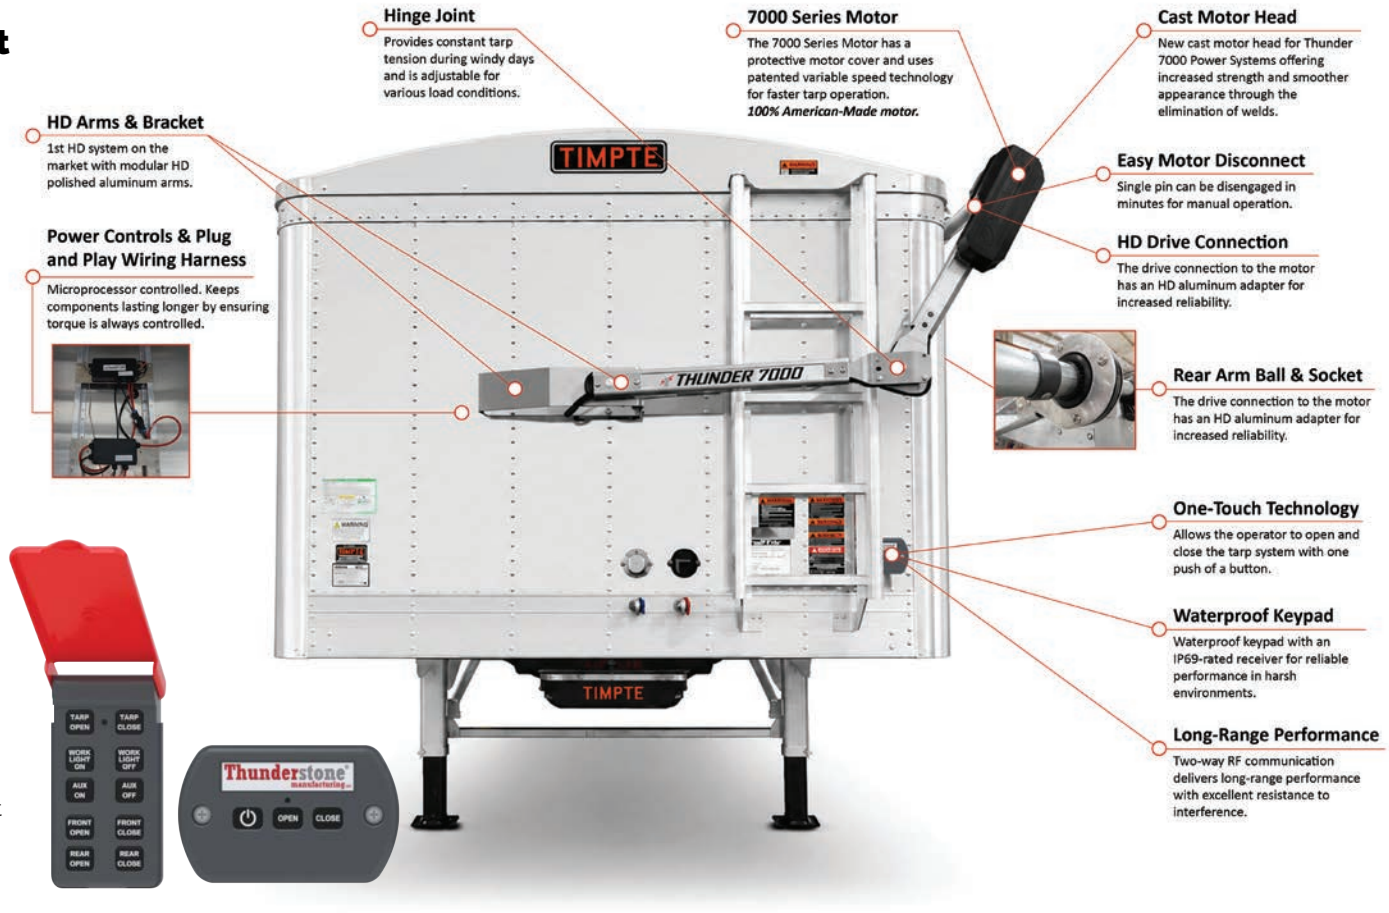

Arm Color Options

*Image shows custom black finish


Standard Mill Finish - 01


Black - 03


White - 04


Hammered Gray - 05



Best In Industry
WARRANTY

PEACE OF MIND 3 YEARS WARRANTY PARTS + PEACE OF MIND 4 YEARS WARRANTY MOTOR

Power Trap Options

Thunderstone manufacturing LLC





EZ Flow Hydraulic Trap

TESTED TO MEET YOUR TOUGH HAULING DEMANDS.

The patented EZ Flow Hydraulic Trap has been thoroughly tested to meet your tough hauling demands since 2016. From field to road there is no hydraulic or electric trap that compares to strength and reliability of the EZ Flow.

PEACE OF MIND 3 YEARS WARRANTY

Features

- Industries BEST Swing Clearance; No trap operator or motor to interfere with swing auger
- Operates using a single 12 volt hydraulic pump
- No Limit Switches
- Easily control product flow by feathering the door open or close
- Standard door opens in 12 seconds & closes in 10 seconds
- Standard with heavy duty reinforcement brackets for hi-density products (silica sand)
- Door opens past the rear trap frame cross-member by 1" (Full Open Door)



EZ Flow Hydraulic Trap Override



In the event of power loss or damage, the EZ Flow doors can be quick-ly converted to manual operation. The manual override system utilizes quick-release pins and straps to open the doors, providing a reliable backup when electrical power is unavailable. This redesigned system is easy to use and offers increased ground clearance compared to previous override systems.

Capacities

LENGTH & HEIGHT	HEAPED 9"				WATER LEVEL			
	96" Wide		102" Wide		96" Wide		102" Wide	
	Ag	Split	Ag	Split	Ag	Split	Ag	Split
18' 0" Length, 72" Height	765 ft³	---	---	---	688 ft³	---	---	---
18' 0" Length, 78" Height	830 ft³	---	---	---	753 ft³	---	---	---
21' 11" Length, 66" Height	828 ft³	---	---	---	734 ft³	---	---	---
21' 11" Length, 72" Height	908 ft³	---	---	---	814 ft³	---	---	---
21' 11" Length, 78" Height	988 ft³	---	---	---	894 ft³	---	---	---
21' 11" Length, 84" Height	1068 ft³	---	---	---	974 ft³	---	---	---
25' 6" Length, 78" Height	---	---	1131 ft³	---	---	---	1013 ft³	---
28' 6" Length, 66" Height	1037 ft³	---	1108 ft³	---	913 ft³	---	976 ft³	---
28' 6" Length, 72" Height	1143 ft³	---	1221 ft³	---	1019 ft³	---	1089 ft³	---
28' 6" Length, 78" Height	1249 ft³	---	1334 ft³	---	1125 ft³	---	1202 ft³	---
33' 5" Length, 66" Height	1247 ft³	---	1332 ft³	---	1101 ft³	---	1176 ft³	---
33' 5" Length, 72" Height	1369 ft³	---	1462 ft³	---	1223 ft³	---	1307 ft³	---
33' 5" Length, 78" Height	1493 ft³	---	1595 ft³	---	1347 ft³	---	1439 ft³	---
36' 0" Length, 66" Height	1327 ft³	---	1420 ft³	---	1172 ft³	---	1254 ft³	---
36' 0" Length, 72" Height	1459 ft³	---	1562 ft³	---	1304 ft³	---	1396 ft³	---
36' 0" Length, 78" Height	1591 ft³	---	1702 ft³	---	1436 ft³	---	1534 ft³	---
36' 10" Length, 78" Height	---	---	1651 ft³	---	---	---	1484 ft³	---
38' 0" Length, 66" Height	1409 ft³	1473 ft³	1505 ft³	---	1245 ft³	1309 ft³	1330 ft³	---
38' 0" Length, 72" Height	1536 ft³	1603 ft³	1640 ft³	1709 ft³	1357 ft³	1421 ft³	1450 ft³	1519 ft³
38' 0" Length, 78" Height	1674 ft³	1738 ft³	1788 ft³	1857 ft³	1479 ft³	1543 ft³	1581 ft³	1650 ft³
40' 0" Length, 66" Height	1439 ft³	1561 ft³	1561 ft³	1692 ft³	1293 ft³	1415 ft³	1408 ft³	1539 ft³
40' 0" Length, 66" Height SL	1439 ft³	1561 ft³	---	---	1293 ft³	1415 ft³	---	---
40' 0" Length, 72" Height	1587 ft³	1709 ft³	1703 ft³	1834 ft³	1441 ft³	1563 ft³	1547 ft³	1678 ft³
40' 0" Length, 72" Height SL	1587 ft³	1709 ft³	---	---	1441 ft³	1563 ft³	---	---
40' 0" Length, 78" Height	1735 ft³	1857 ft³	1861 ft³	1992 ft³	1589 ft³	1711 ft³	1705 ft³	1836 ft³

BULK COMMODITY

PRODUCTS	LBS. PER CUBIC FT	LBS. PER BUSHEL
alfalfa meal	17	21
alfalfa seed	48	60
barley,whole	38	47
beans	50	62
bran	16	20
brewer's grain, dry	42	52
corn,cracked	45-50	56-62
corn,shelled	45	56
cottonseed	26	32
cornmeal	38-40	47-50
cottonseed meal	35-40	44-50
dirt,common dry	70-80	-
fertilizer	60	-
flaxseed	45	56
flaxseed meal	25	31

Cubic Feet (ft³) ÷ 1.244 = Bush


PRODUCT CHART

PRODUCTS	LBS. PER CUBIC FT	LBS. PER BUSHEL
gravel, dry	90-100	-
limestone, loose	100	-
limestone, pulverized	85-90	-
oats	26	32
oats, crushed	22	27
molasses feed	40	50
potash	80	-
rice, hulled	45-48	56-60
sand, dry	90-110	-
soybeans, whole	45-50	56-62
soybean meal	40	50
soybeans, cracked	32-36	40-45
sunflower seed	19-26	24-32
wheat, cracked	40-45	50-56
wheat	45-48	56-60


nel Capacity of Corn, Shelled

LENGTH & HEIGHT	HEAPED 9"				WATER LEVEL			
	96" Wide		102" Wide		96" Wide		102" Wide	
	Ag	Split	Ag	Split	Ag	Split	Ag	Split
40' 0" Length, 84" Height	1886 ft³	2008 ft³	2019 ft³	2150 ft³	1735 ft³	1857 ft³	1863 ft³	1994 ft3
42' 2" Length, 66" Height	1468 ft³	1602 ft³	1576 ft³	1720 ft³	1319 ft³	1453 ft³	1417 ft³	1561 ft³
42' 2" Length, 66" Height SL	1,468 ft³	1,602 ft³	---	---	1,319 ft³	1,453 ft³	---	---
42' 2" Length, 72" Height	1,619 ft³	1,753 ft³	1,738 ft³	1,882 ft³	1,467 ft³	1,601 ft³	1,576 ft³	1,720 ft³
42' 2" Length, 72" Height SL	1,619 ft³	1,753 ft³	---	---	1,467 ft³	1,601 ft³	---	---
42' 2" Length, 78" Height	1,776 ft³	1,910 ft³	1,904 ft³	2,048 ft³	1,622 ft³	1,756 ft³	1,739 ft³	1,883 ft³
42' 2" Length, 84" Height	1,932 ft³	2,066 ft³	2,070 ft³	2,214 ft³	1,778 ft³	1,912 ft³	1,905 ft³	2,049 ft³
42' 2" Length, 90" Height	2,087 ft³	2,221 ft³	2,235 ft³	2,379 ft³	1,933 ft³	2,067 ft³	2,070 ft³	2,214 ft³
43' 0" Length, 72" Height	1,742 ft³	1,887 ft³	1,867 ft³	2,025 ft³	1,586 ft³	1,731 ft³	1,700 ft³	1,858 ft³
43' 0" Length, 78" Height	1,908 ft³	2,053 ft³	2,043 ft³	2,201 ft³	1,752 ft³	1,897 ft³	1,876 ft³	2,034 ft³
43' 0" Length, 84" Height	2,075 ft³	2,220 ft³	2,221 ft³	2,379 ft³	1,919 ft³	2,064 ft³	2,054 ft³	2,212 ft³
43' 0" Length, 90" Height	2,242 ft³	2,387 ft³	2,399 ft³	2,557 ft³	2,086 ft³	2,231 ft³	2,232 ft³	2,390 ft³
43' 0" Length, 96" Height	2,409 ft³	2,554 ft³	2,577 ft³	2,735 ft³	2,253 ft³	2,398 ft³	2,410 ft³	2,568 ft³
43' 0" Length, 102" Height	2,576 ft³	2,721 ft³	2,755 ft³	2,913 ft³	2,420 ft³	2,565 ft³	2,588 ft³	2,746 ft³
48' 0" Length, 66" Height	1,581 ft³	1,726 ft³	---	---	1,425 ft³	1,570 ft³	---	---
48' 0" Length, 72" Height	1,752 ft³	1,897 ft³	---	---	1,592 ft³	1,737 ft³	---	---
48' 0" Length, 78" Height	1,923 ft³	2,068 ft³	2,059 ft³	2,217 ft³	1,760 ft³	1,905 ft³	1,884 ft³	2,042 ft³
48' 0" Length, 84" Height	---	---	2,242 ft³	2,400 ft³	---	---	2,064 ft³	2,222 ft³
48' 0" Length, 90" Height	---	---	2,425 ft³	2,583 ft³	---	---	2,244 ft³	2,402 ft³
50' 0" Length, 66" Height	1,581 ft³	1,726 ft³	---	---	1,424 ft³	1,569 ft³	---	---
50' 0" Length, 72" Height	1,753 ft³	1,898 ft³	1,879 ft³	2,037 ft³	1,591 ft³	1,736 ft³	1,706 ft³	1,864 ft³
50' 0" Length, 72" Height SL	1,785 ft³	1,930 ft³	---	---	1,594 ft³	1,739 ft³	---	---
50' 0" Length, 78" Height	1,929 ft³	2,074 ft³	2,065 ft³	2,223 ft³	1,762 ft³	1,907 ft³	1,886 ft³	2,044 ft³
50' 0" Length, 84" Height	2,103 ft³	2,248 ft³	2,250 ft³	2,408 ft³	1,933 ft³	2,078 ft³	2,068 ft³	2,226 ft³
50' 0" Length, 90" Height	---	---	2,434 ft³	2,592 ft³	---	---	2,249 ft³	2,407 ft³


Diagrams

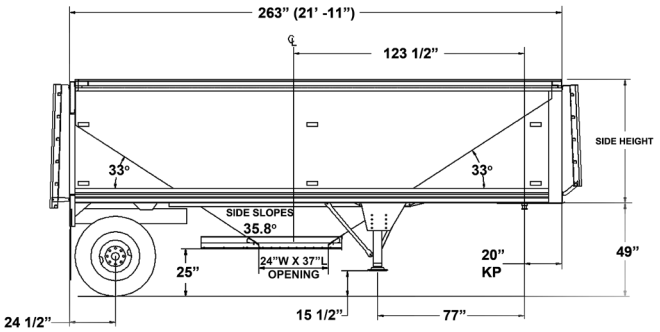


21' 11" SUPER HOPPER

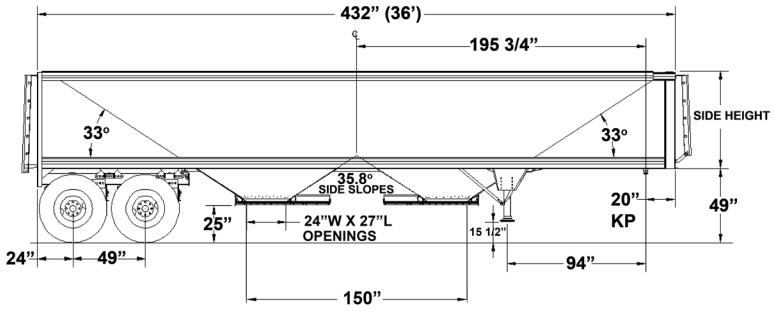


36' SUPER HOPPER

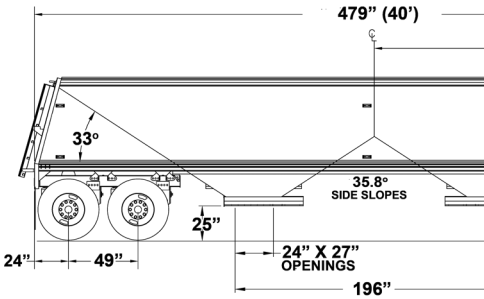


40' SUPER HOPPER SL

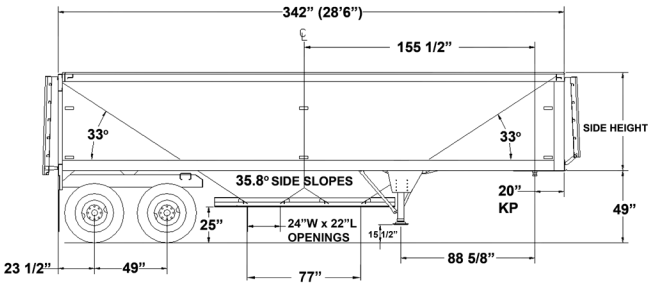


28' 6" SUPER HOPPER

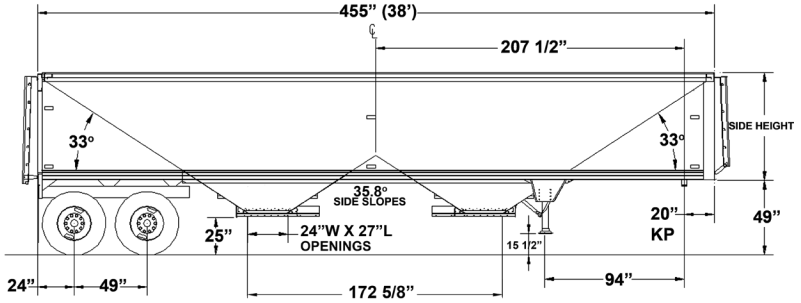


38' SUPER HOPPER

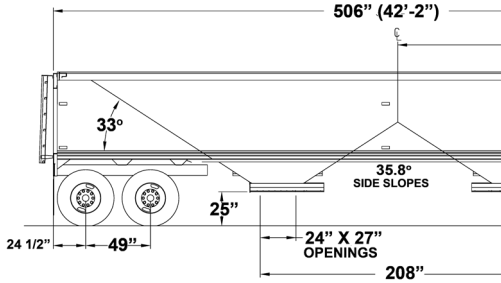


42' 2" SUPER HOPPER

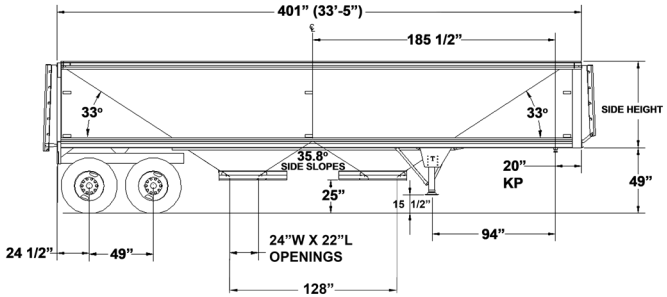


33' 5" SUPER HOPPER

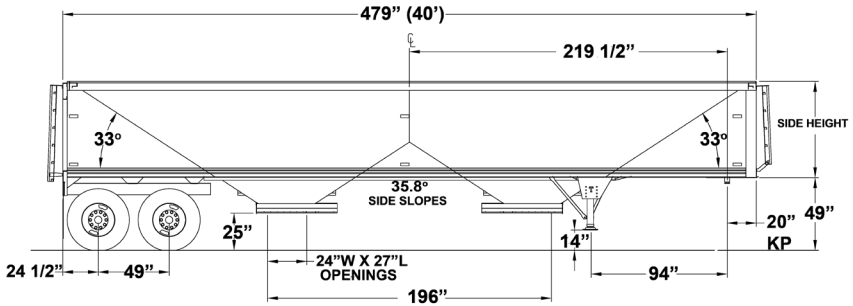


40' SUPER HOPPER

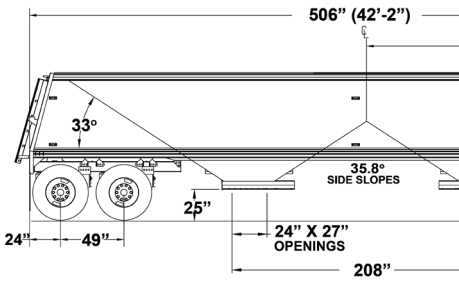


42' 2" SUPER HOPPER SL




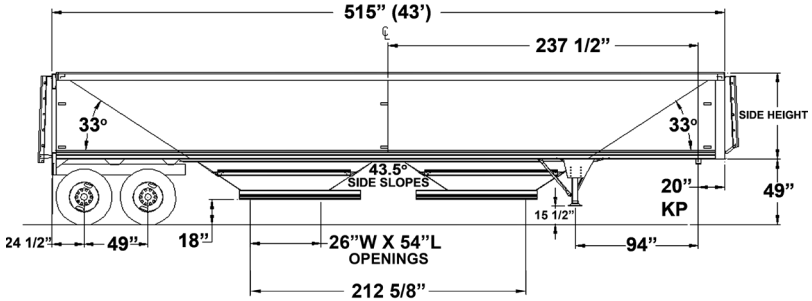


43’ SUPER CUBE

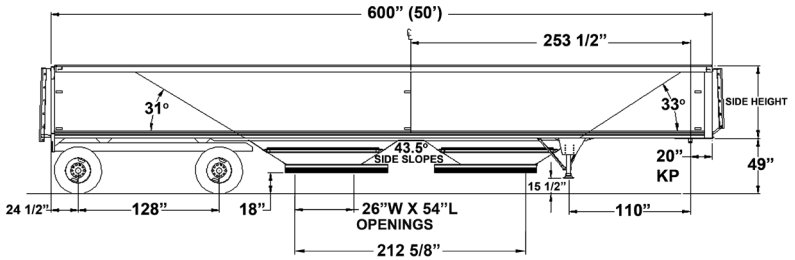


50’ SPREAD-AXLE SUPER HOPPER




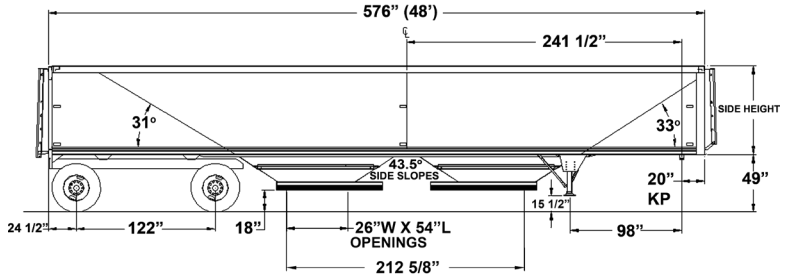


48’ SPREAD-AXLE SUPER HOPPER

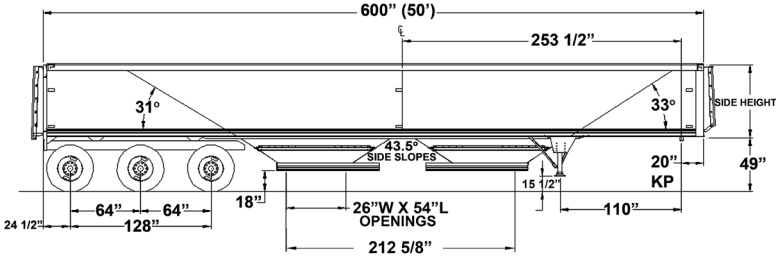


50’ TRI-AXLE SUPER HOPPER



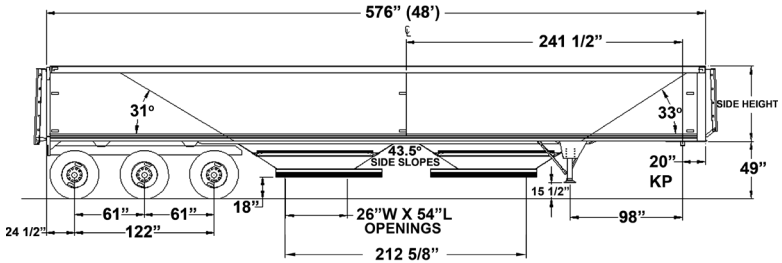

48’ TRI-AXLE SUPER HOPPER

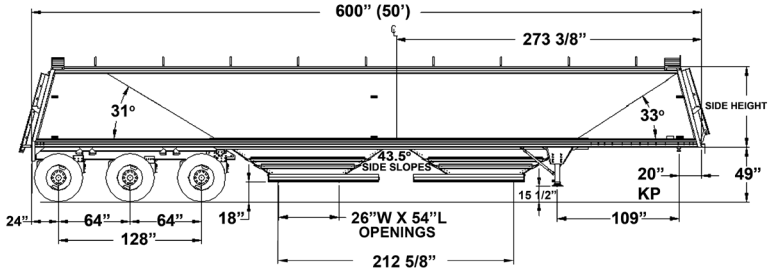

50’ SUPER HOPPER SL

TIMPTE®

Since 1884

100 Timpte Parkway / David City, NE 68632 / (402) 367-3056 / timpte.com / sales@timpte.com